WAAS CH 62829 W18A	APP CRS 175°	Rwy Ldg 9000 TDZE 492 Apt Elev 542

RNAV (GPS) Y RWY 18L

AUSTIN-BERGSTROM INTL (AUS)


RNP APCH-GPS.


T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV visibility all Cats to RVR 6000, and LNAV visibility Cats C, D, and E to RVR 6000.

ALSF-2


MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct HOOKK and hold.

D-ATIS	AUSTIN APP CON	AUSTIN TOWER	GND CON
124.4	127.225 317.65 (E) 120.875 270.25 (S) 119.0 370.85 (W)	121.0 281.5	121.9 348.6

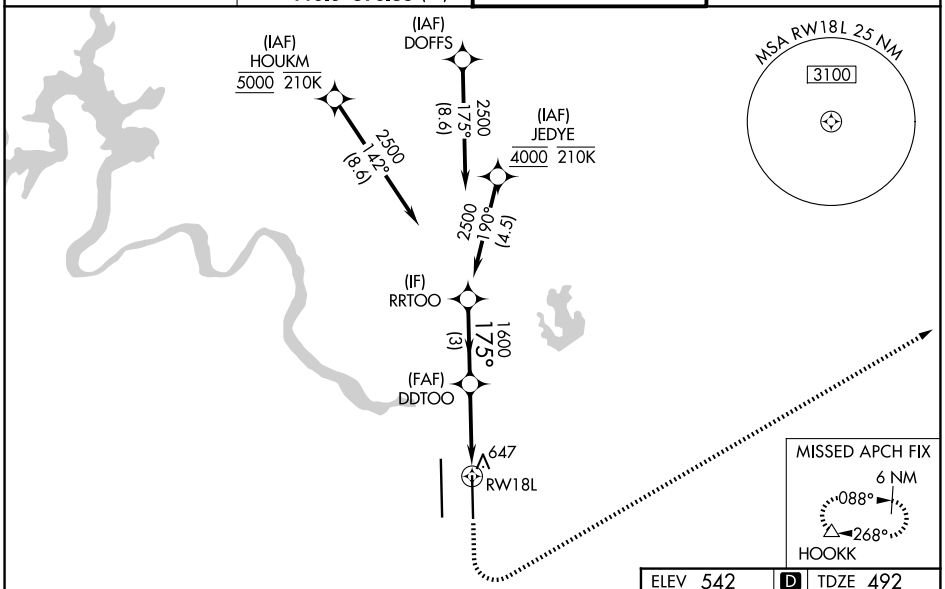

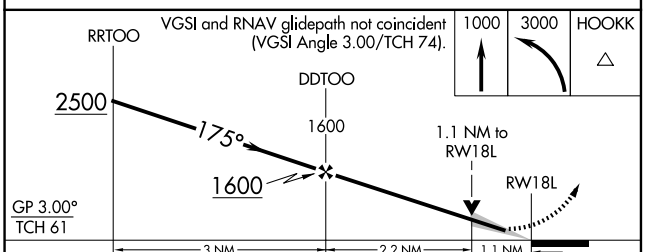

CATEGORY	A	B	C	D	E
LPV DA	692/18 200 (200-½)				
LNAV/VNAV DA	906/40 414 (400-¾)				
LNAV MDA	900/24 408 (400-½)		900/40 408 (400-¾)		
CIRCLING	1040-1 498 (500-1)	1120-1 578 (600-1)	1200-1¾ 658 (700-1¾)	1200-2 658 (700-2)	NA

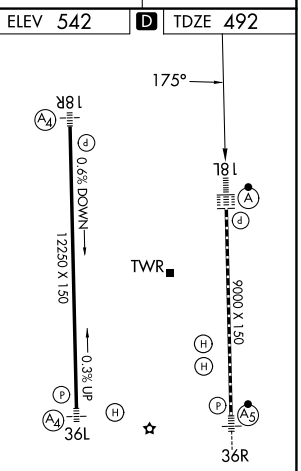

HIRL Rwys 18L-36R and 18R-36L
TDZL/RCLS Rwys 18L and 36R

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026