RNAV (GPS) Y RWY 18R

AUSTIN-BERGSTROM INTL (AUS)

WAAS CH 77530 W18B	APP CRS 175°	Rwy Ldg 12250 TDZE 542 Apt Elev 542


RNP APCH-GPS.


T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. Use of FD or AP required during simultaneous operations. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500; increase LNAV Cat E visibility to RVR 5500.

MALS


MISSED APPROACH: Climb to 1000 then climbing right turn to 3500 direct GARDS and hold.

D-ATIS	AUSTIN APP CON	AUSTIN TOWER	GND CON
124.4	127.225 317.65 (E) 120.875 270.25 (S) 119.0 370.85 (W)	121.0 281.5	121.9 348.6

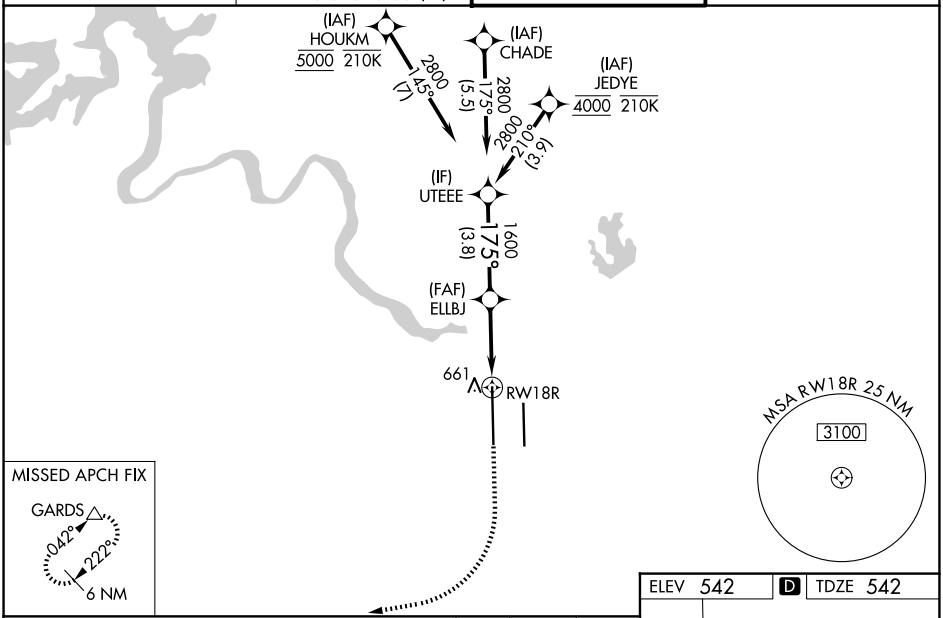

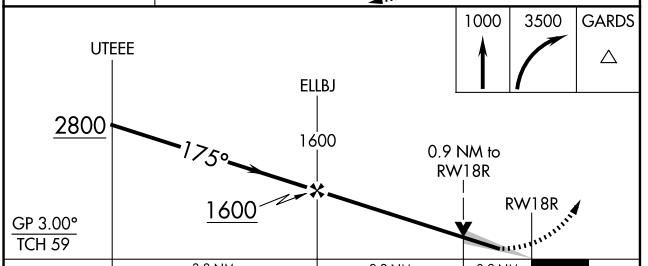

CATEGORY	A	B	C	D	E
LPV DA	742/40 200 (200-¾)				
LNAV/VNAV DA	834/40 292 (300-¾)				
LNAV MDA	900/40 358 (400-¾)				
CIRCLING	1040-1 498 (500-1)	1120-1 578 (600-1)	1200-1¾ 658 (700-1¾)	1200-2 658 (700-2)	NA

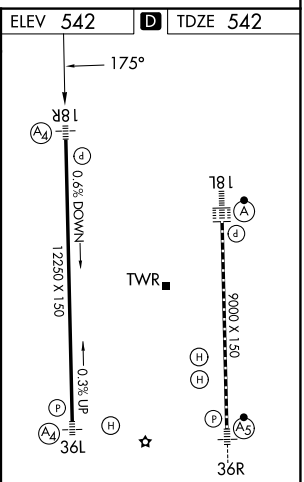

HIRL Rwys 18L-36R and 18R-36L
TDZL/RCLS Rwys 18L and 36R

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026