RNAV (GPS) RWY 5

BOCA RATON (BCT)


WAAS CH 82101 W05A	APP CRS 049°	Rwy Ldg 5580 TDZE 12 Apt Elev 13


RNP APCH-GPS.

T A Baro-VNAV NA when using DJT altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use DJT altimeter setting: increase LPV DA to 326 feet; increase LNAV/VNAV DA to 501 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ⅛ SM and Circling Cats C and D ¼ SM. In minimum visibility conditions bright lights on highway ¼ mile north of airport may be mistaken for runway lights. Rwy 5 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 2000 direct KISEC and hold.

D-ATIS	PALM BEACH APP CON	BOCA RATON TOWER★	GND CON	GCO
121.125	127.35 343.6	118.425 (CTAF) L	121.8	127.35

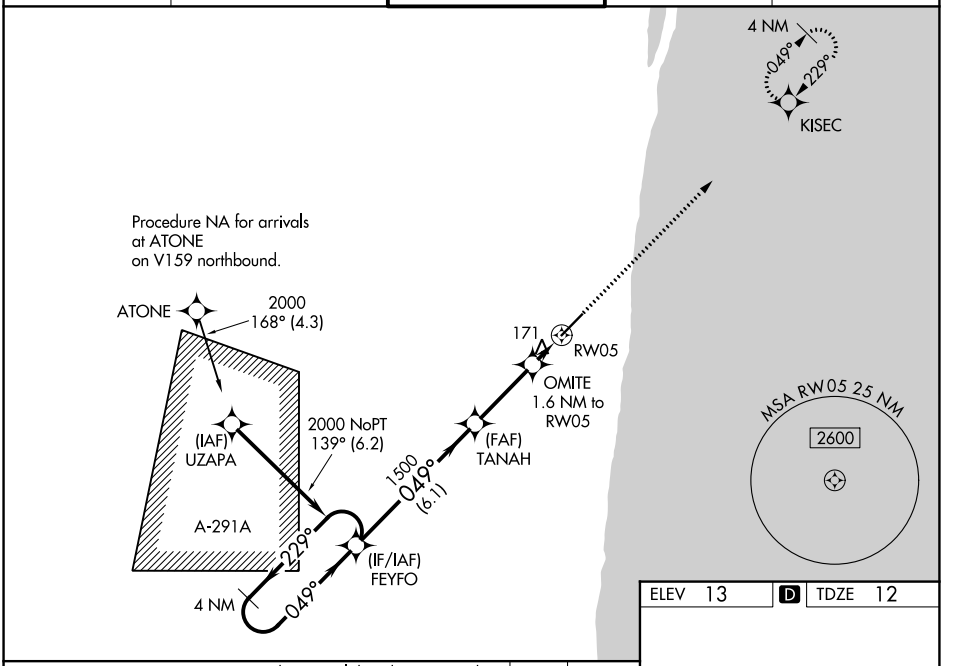

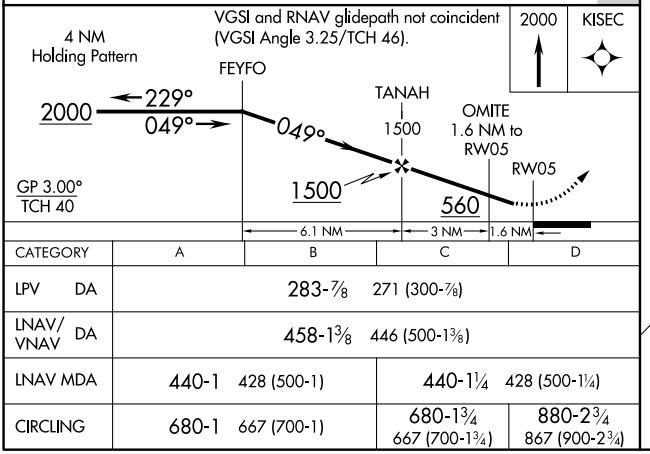

CATEGORY	A	B	C	D
LPV DA	283-⅞	271 (300-⅞)		
LNAV/VNAV DA	458-1⅜	446 (500-1⅜)		
LNAV MDA	440-1	428 (500-1)	440-1¼	428 (500-1¼)
CIRCLING	680-1	667 (700-1)	680-1¾ 667 (700-1¾)	880-2¾ 867 (900-2¾)

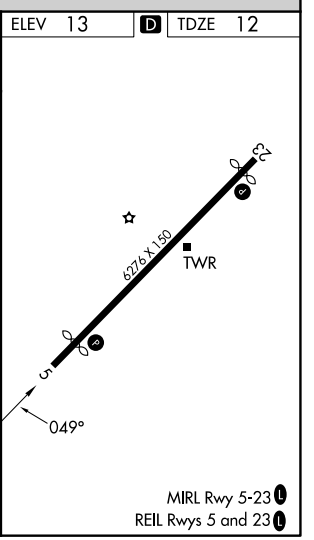

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026