RNAV (RNP) Z RWY 17L

ORLANDO INTL (MCO)

APP CRS	Rwy Ldg	9001
185°	TDZE	90
	Apt Elev	96


RNP AR APCH - GPS. Authorization required. From PTMAN: RF.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 3°C or above 54°C. For inop ALS, increase RNP 0.12 all Cats visibility to RVR 4500 and RNP 0.3 all Cats visibility to 5500.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct PRESK and hold, continue climb-in-hold to 3000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON
121.25	124.8 307.0	118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	126.4 (E) 121.8 (W)

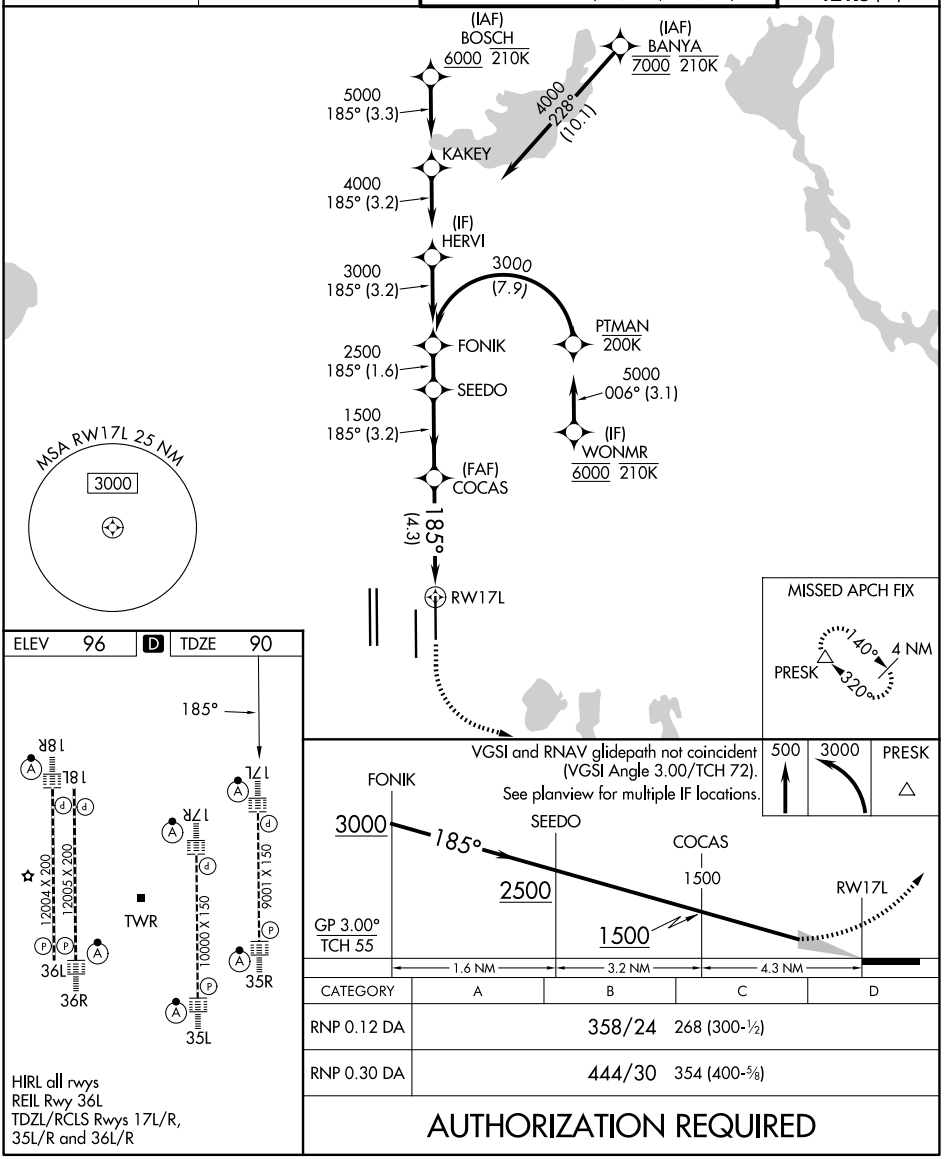

HIRL all rwys
REIL Rwy 36L
TDZL/RCLS Rwys 17L/R, 35L/R and 36L/R

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).
See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.12 DA	358/24 268 (300-½)			
RNP 0.30 DA	444/30 354 (400-⅝)			

AUTHORIZATION REQUIRED

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026