APP CRS	Rwy Ldg	9001
005°	TDZE	90
	Apt Elev	96

RNAV (RNP) Z RWY 35R

ORLANDO INTL (MCO)


RNP AR APCH - GPS. Authorization required. From CAVMN: RF.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase RNP 0.13 all Cats visibility to RVR 4500.


ALSF-2

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct PRESK and hold, continue climb-in-hold to 3000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON
121.25	124.8 307.0	118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	126.4 (E) 121.8 (W)

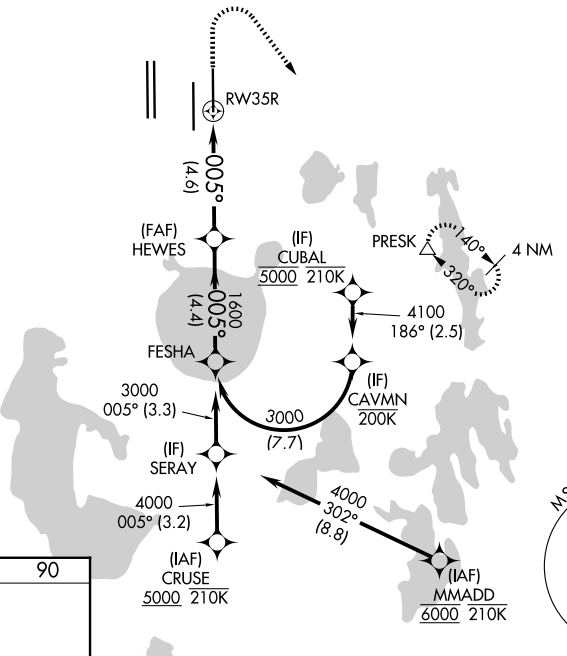

ELEV 96 D TDZE 90

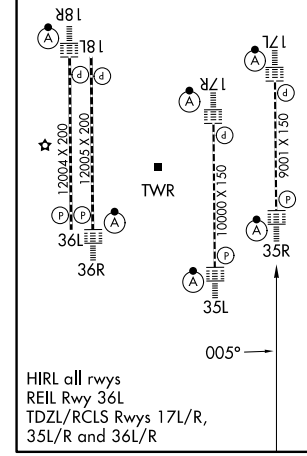


HIRL all rwys
REIL Rwy 36L
TDZL/RCLS Rwys 17L/R, 35L/R and 36L/R

500 3000 PRESK

See planview for multiple IF locations.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).

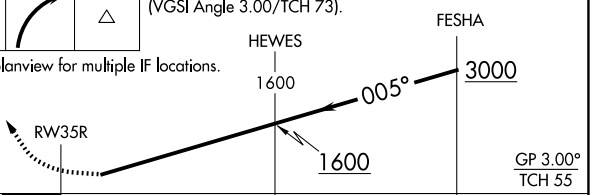

CATEGORY	A	B	C	D
RNP 0.13 DA	360/24		270 (300-½)	
RNP 0.30 DA	430/26		340 (400-½)	

AUTHORIZATION REQUIRED

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026