RNAV (RNP) Z RWY 36L

ORLANDO INTL (MCO)

APP CRS	Rwy Ldg	11621
005°	TDZE	93
	Apt Elev	96


RNP AR APCH - GPS. Authorization required. From CIVOG: RF.


For uncompensated Baro-VNAV systems, procedure NA below 3°C or above 54°C. Simultaneous approach authorized.


MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct DNMOR and hold, continue climb-in-hold to 3000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON
121.25	124.8 307.0	118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	126.4 (E) 121.8 (W)


MISSED APCH FIX



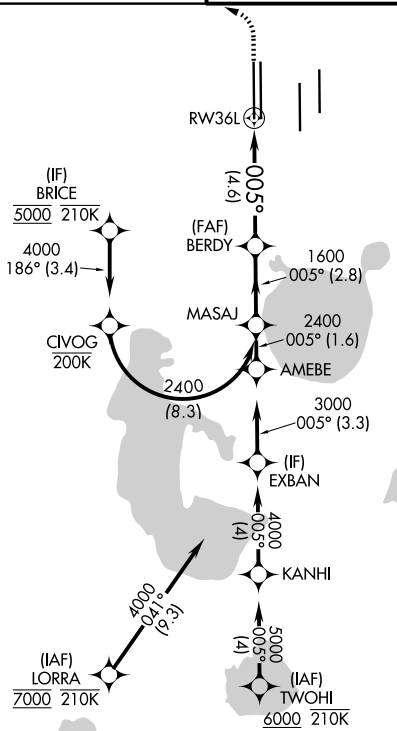



ELEV 96 D TDZE 93

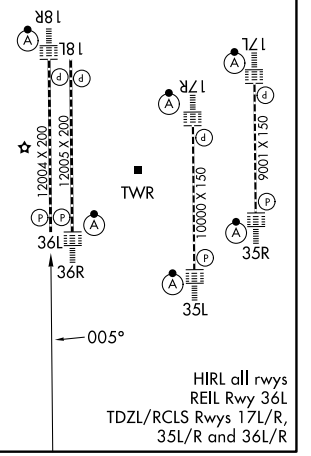


HIRL all rwys
REIL Rwy 36L
TDZL/RCLS Rwys 17L/R, 35L/R and 36L/R

500 3000 DNMOR

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

See planview for multiple IF locations.

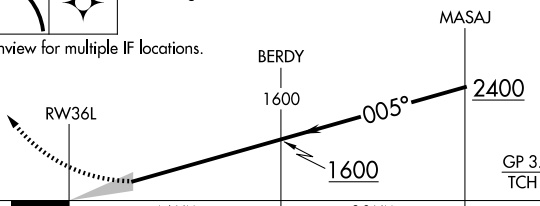

CATEGORY	A	B	C	D
RNP 0.13 DA	380/45 287 (300-⅞)			
RNP 0.30 DA	458/55 365 (400-1)			

AUTHORIZATION REQUIRED

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026