WAAS	APP CRS	Rwy Ldg	9001
CH 69214	185°	TDZE	90
W17B		Apt Elev	96

RNAV (GPS) Y RWY 17L

ORLANDO INTL (MCO)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized. Bright lights on highway midway between Rwy 17L and Rwy 17R may be mistaken for runway lights. For inop ALS, increase LNAV Cats C/D visibility to RVR 6000.

ALSF-2


MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct PRESK and hold, continue climb-in-hold to 3000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON
121.25	124.8 307.0	118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	126.4 (E) 121.8 (W)

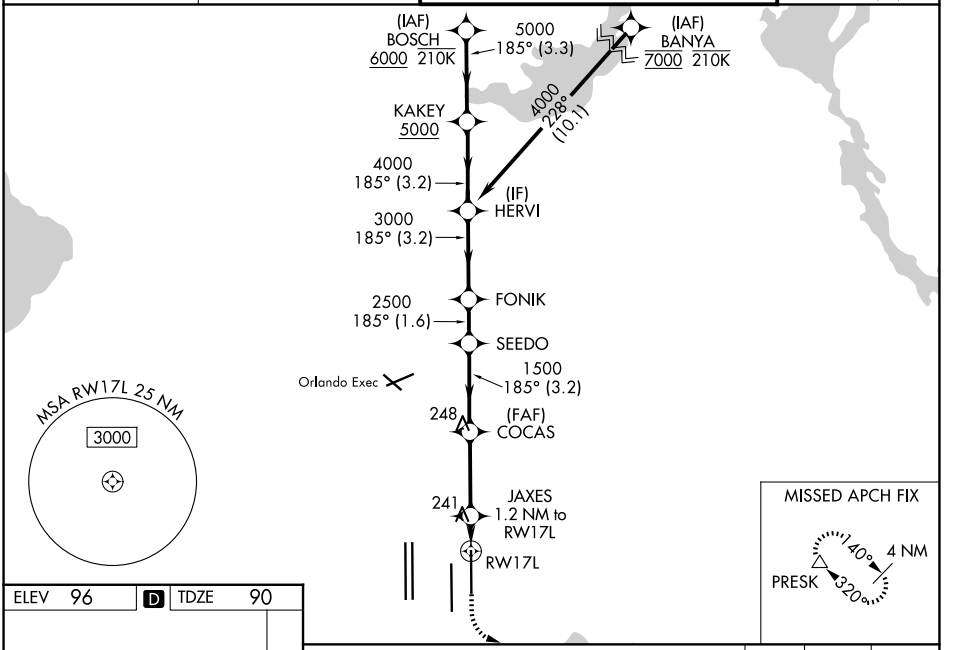

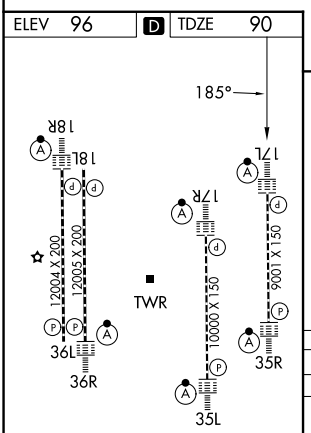

HIRL all rwys
REIL Rwy 36L
TDZL/RCLS Rwys 17L/R, 35L/R and 36L/R

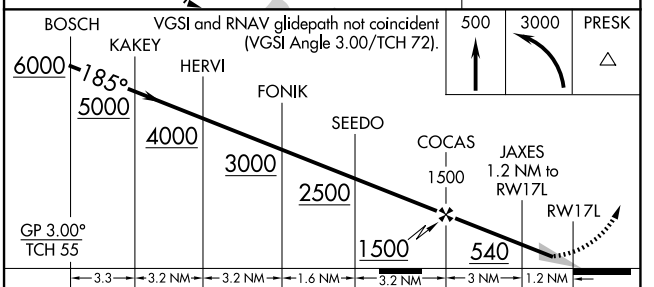

CATEGORY	A	B	C	D
LPV DA	290/18 200 (200-½)			
LNAV/VNAV DA	513/40 423 (500-¾)			
LNAV MDA	500/24 410 (500-½)		500/40 410 (500-¾)	
CIRCLING	740-1 644 (700-1)		740-1¾ 644 (700-1¾)	740-2 644 (700-2)

SE-3, 29 OCT 2026 to 26 NOV 2026