RNAV (GPS) Y RWY 36L

ORLANDO INTL (MCO)


WAAS	APP CRS	Rwy Ldg	11621
CH 82313	005°	TDZE	93
W36B		Apt Elev	96


RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. Use of FD or AP required during simultaneous operations.

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct DNMOR and hold, continue climb-in-hold to 3000.


D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON
121.25	124.8 307.0	118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	126.4 (E) 121.8 (W)

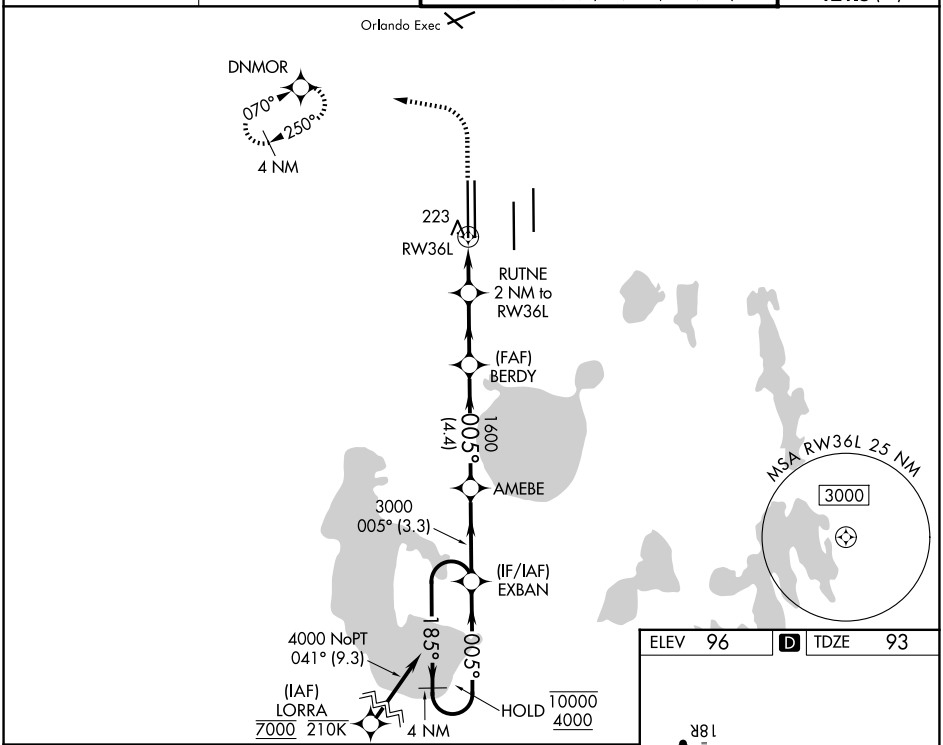

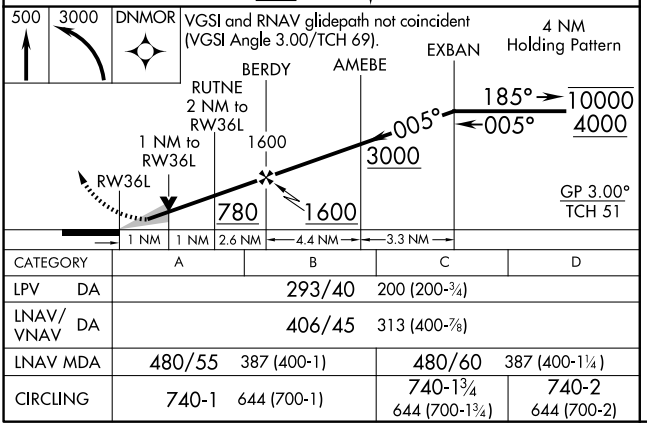

CATEGORY	A	B	C	D
LPV DA	293/40	200 (200-¾)		
LNAV/VNAV DA	406/45	313 (400-⅞)		
LNAV MDA	480/55	387 (400-1)	480/60	387 (400-1¼)
CIRCLING	740-1	644 (700-1)	740-1¾ 644 (700-1¾)	740-2 644 (700-2)

ELEV 96 D TDZE 93

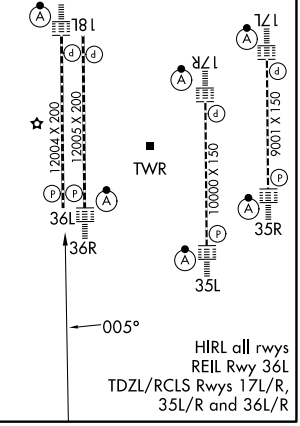

HIRL all rwys
REIL Rwy 36L
TDZL/RCLS Rwys 17L/R, 35L/R and 36L/R

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026