RNAV (GPS) RWY 14

GULFPORT-BILOXI INTL (GPT)

WAAS	APP CRS	Rwy Ldg	9002
CH 97301	137°	TDZE	27
W14A		Apt Elev	28


RNP APCH.

ASR: For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500. **RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 2800 direct IVOLE and hold.

ATIS	GULFPORT APP CON ★	GULFPORT TOWER ★	GND CON	UNICOM
119.45	127.5 254.25	123.7 (CTAF) L 339.8	120.4 348.6	122.95

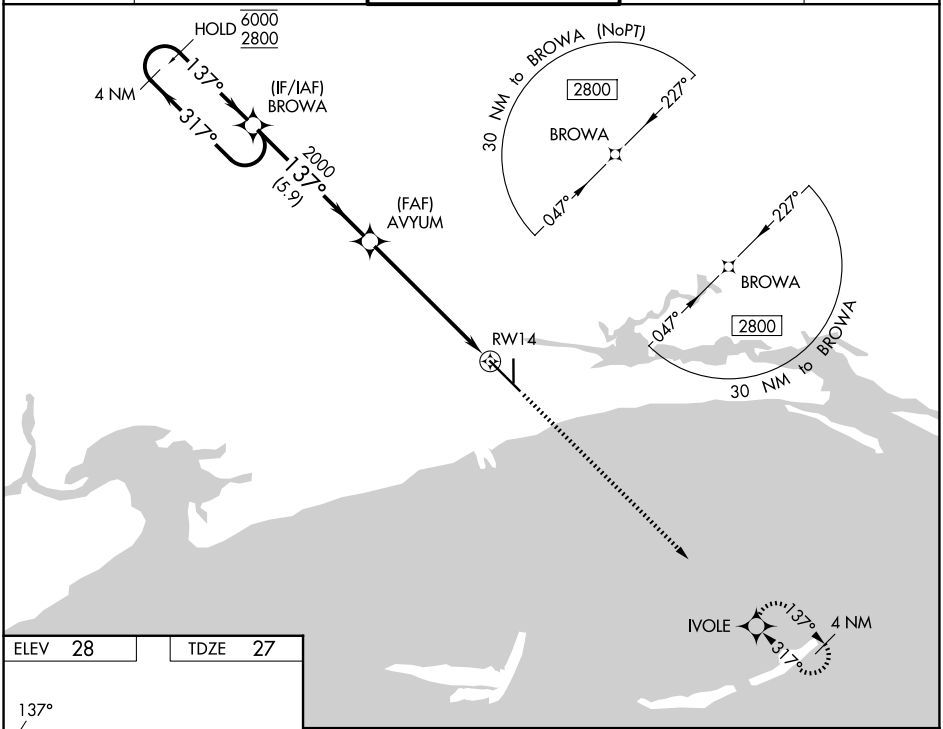


ELEV 28 TDZE 27



HIRL Rwy 14-32 L

MIRL Rwy 18-36 L

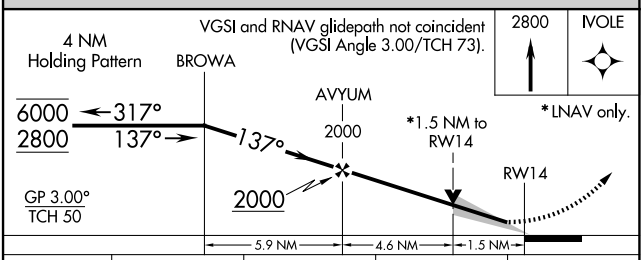

CATEGORY	A	B	C	D
LPV DA**	227/24 200 (200-½)			
LNAV/VNAV DA	404/35 377 (400-⅝)			
LNAV MDA	580/24 553 (600-½)		580/60 553 (600-1¼)	
CIRCLING	580-1 552 (600-1)	640-1 612 (700-1)	820-2¼ 792 (800-2¼)	820-2½ 792 (800-2½)

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026