RNAV (RNP) Z RWY 21

IDAHO FALLS RGNL (IDA)

APP CRS	Rwy Ldg	9002
206°	TDZE	4735
	Apt Elev	4744

RNP AR APCH-GPS.


For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 54°C. For inop ALS, increase RNP 0.11 visibility all Cats to RVR 4500.

2°C


MALSR

MISSED APPROACH: Climb to 7500 on track 206° to UGADE, right turn to STOPS, and on track 259° to ROCCA and hold.

ATIS	SALT LAKE CENTER	IDAHO FALLS TOWER★	GND CON	GCO	UNICOM
135.325	128.35 239.25	118.5 (CTAF) L 257.8	121.7	121.725	122.95

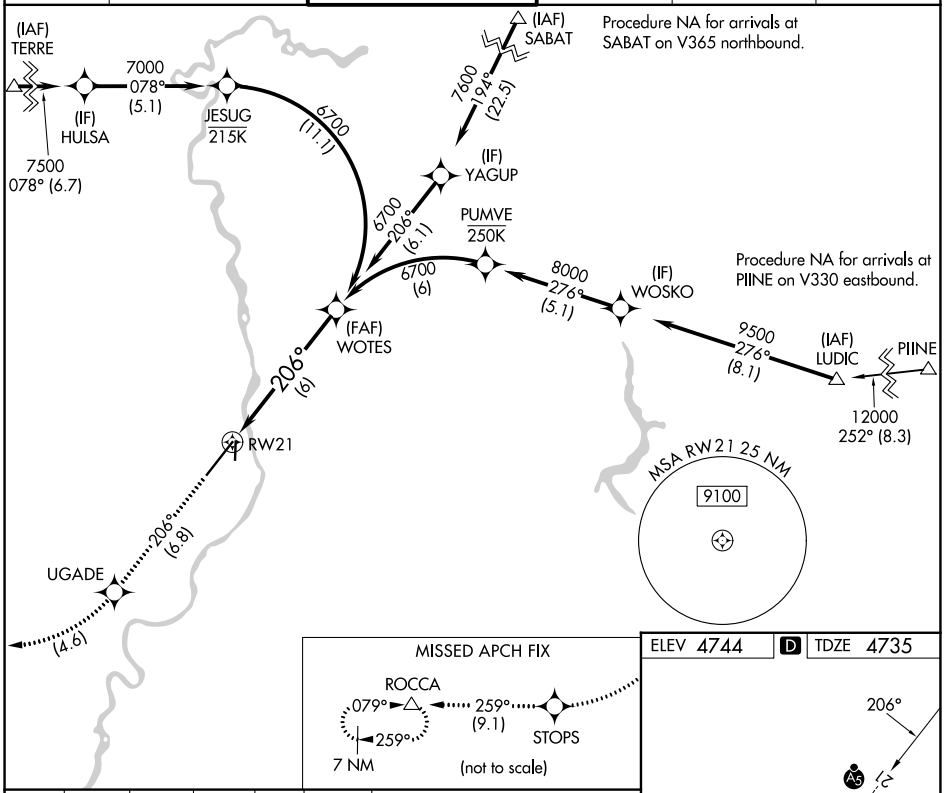

7500 tr 206°	UGADE		STOPS	tr 259°	ROCCA

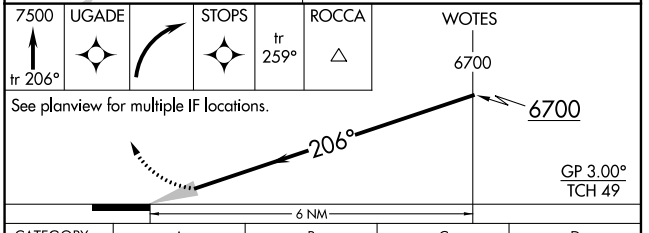


See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.11 DA		5011/24	276 (300-½)	
RNP 0.30 DA		5120/35	385 (400-⅝)	

AUTHORIZATION REQUIRED

ELEV 4744 D TDZE 4735

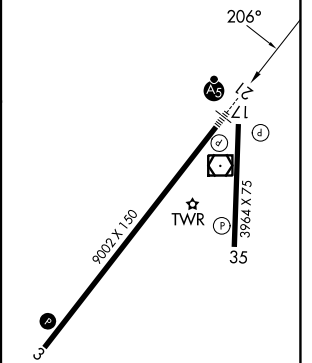

REIL Rwy 3 L
HIRL Rwy 3-21 L
MIRL Rwy 17-35

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026