ILS or LOC RWY 23

COLUMBUS MUNI (BAK)

LOC I-BAK	APP CRS	Rwy Ldg	6401
110.7	228°	TDZE	656
		Apt Elev	656

ADF or RADAR required.

T A NA — For inop ALS increase S-LOC 23 Cats C/D visibility to 1 ⅛ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct CLIFS LOM and hold, continue climb-in hold to 2300.

AWOS-3	INDIANAPOLIS APP CON	COLUMBUS TOWER★	GND CON	UNICOM
119.75	134.85 317.8	118.6 (CTAF) L	121.6	122.95

Procedure NA for arrival on SHB VOR/DME airway radials 124 CW 231.

SHELBYVILLE
116.15 SHB
Chan 108(Y)

2400
178°
(18.6)

183°
003°
048°
228°
048°
810


LOM/IAF
CLIFS
410 BA
RADAR

R-3401B
R-3401A

LOCALIZER 110.7
I-BAK


MSA BA 25 NM
3100
090°
270°
2500

ELEV 656 D TDZE 656



MIRL Rwy 14-32 L
HIRL Rwy 5-23 L
REIL Rwys 5, 14, and 32 L

FAF to MAP 4.6 NM					
Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

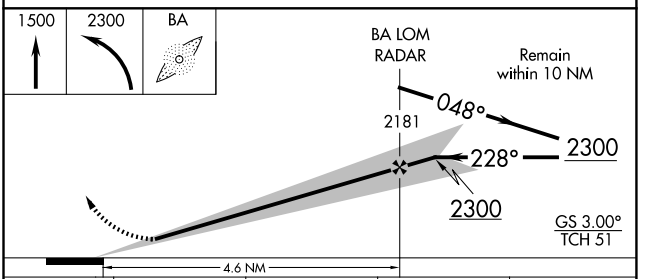

CATEGORY	A	B	C	D
S-ILS 23	856-½ 200 (200-½)			
S-LOC 23	1060-½ 404 (500-½)		1060-¾ 404 (500-¾)	
CIRCLING	1140-1 484 (500-1)		1200-1½ 544 (600-1½)	1400-2½ 744 (800-2½)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026