WAAS	APP CRS	Rwy Ldg	9604
CH 60922	128°	TDZE	632
W13A		Apt Elev	661

RNAV (GPS) RWY 13

GENERAL DOWNING - PEORIA INTL (PIA)


RNP APCH - GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting increase LPV DA to 1110 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1168 feet and all visibilities ⅛ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inop ALS, increase LPV all Cats visibility to 1⅛ SM, LNAV Cat A/B visibility to 1 SM and Cat C/D visibility to 1⅜ SM. For inop ALS when using Lincoln altimeter setting, increase LPV visibility all Cats to 1⅜ SM and LNAV Cat A/B visibility to 1 SM.


MALSR (A5)

MISSED APPROACH: Climb to 2400 direct CASIP and hold.

ATIS	SAINT LOUIS APP CON	PEORIA TOWER	GND CON	CLNC DEL
126.1 282.2	125.8 269.2	124.0 353.85	121.85 348.6	124.675 317.55

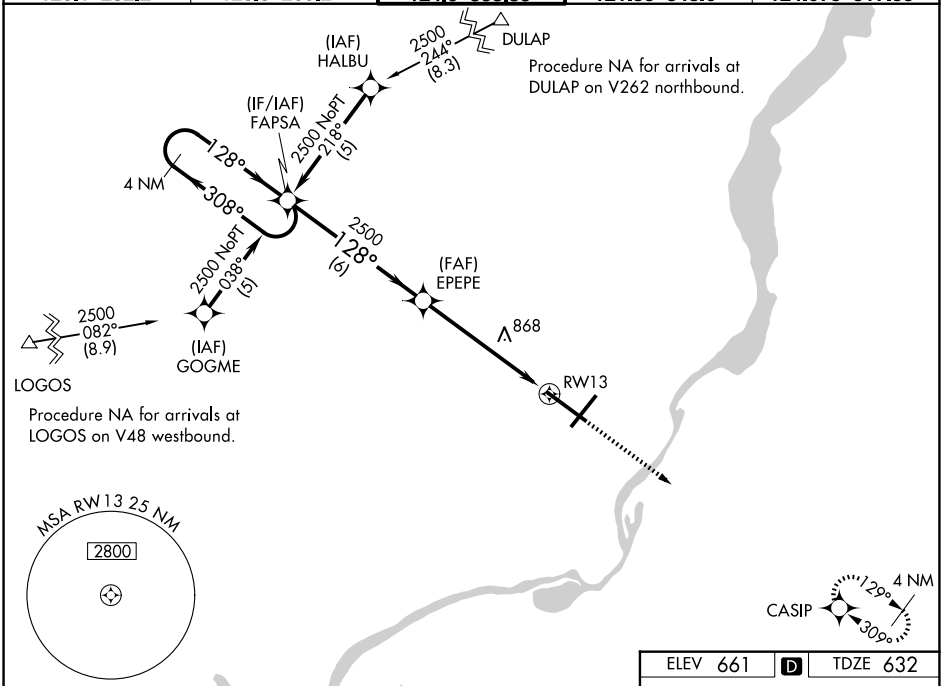

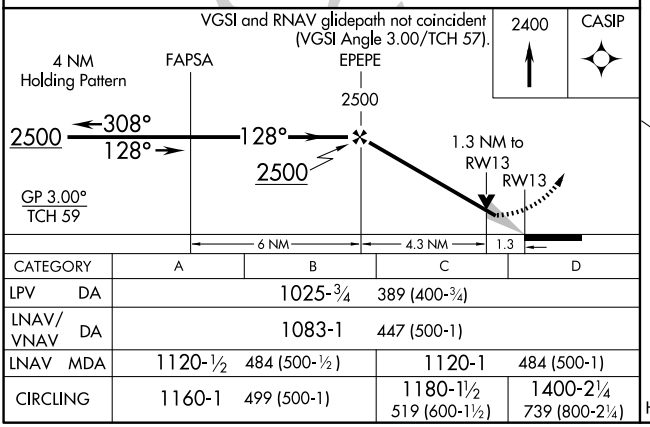

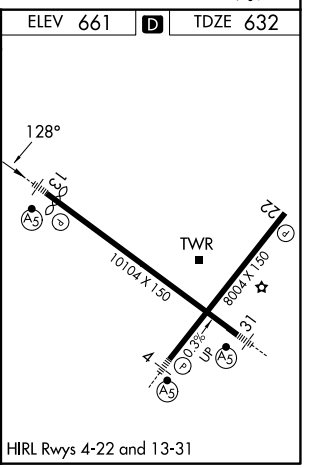

CATEGORY	A	B	C	D
LPV DA	1025-¾	389 (400-¾)		
LNAV/VNAV DA	1083-1	447 (500-1)		
LNAV MDA	1120-½	484 (500-½)	1120-1	484 (500-1)
CIRCLING	1160-1	499 (500-1)	1180-1½ 519 (600-1½)	1400-2¼ 739 (800-2¼)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026