| WAAS | APP CRS | Rwy Ldg 4801 |
|---|---|---|
| CH 40405 | 093° | TDZE 3 |
| W09A | | Apt Elev 3 |

# RNAV (GPS) RWY 9

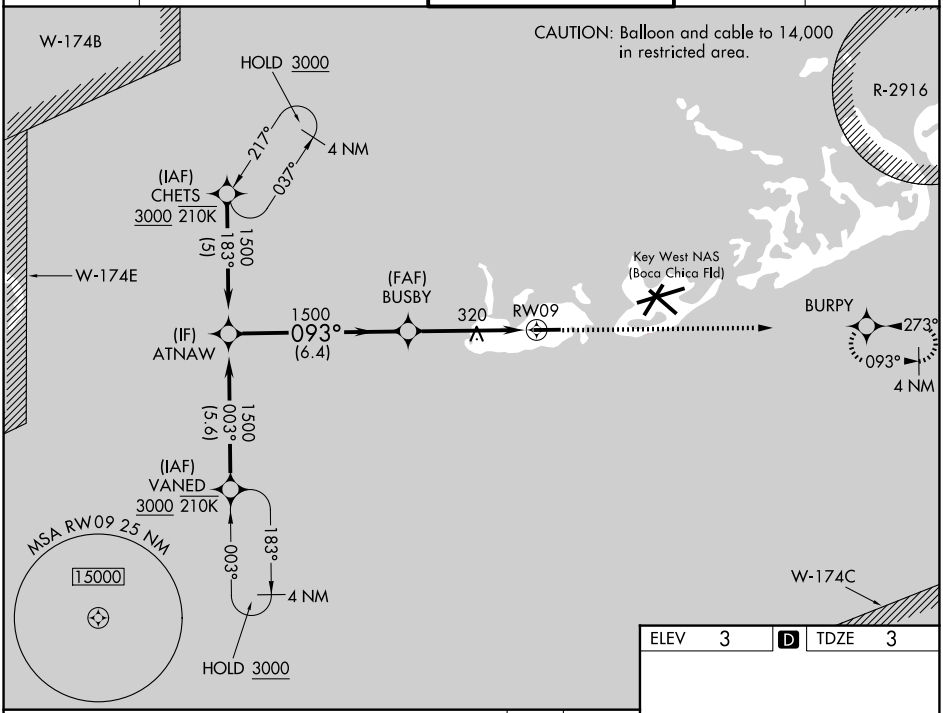
## KEY WEST INTL (EYW)

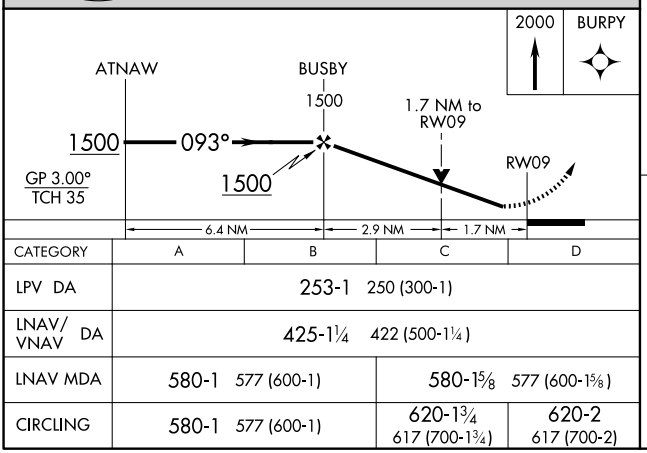
RNP APCH-GPS.

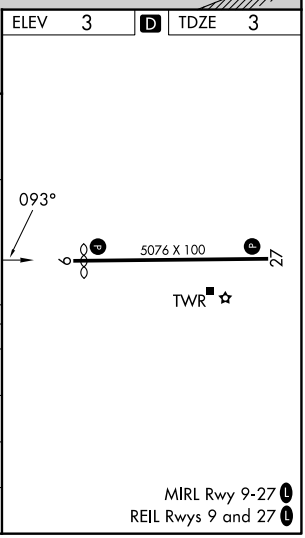
T A W For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 12°C or above 54°C. Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using NQX altimeter setting. When local altimeter setting not received, use NQX altimeter setting.

MISSED APPROACH: Climb to 2000 direct BURPY and hold.

| ATIS | NAVY KEY WEST APP CON ★ | KEY WEST TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 119.675 | 124.025 313.7 | 118.2 (CTAF) L 257.8 | 121.9 | 122.95 |




| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 253-1 250 (300-1) | | | |
| LNAV/VNAV DA | 425-1¼ 422 (500-1¼) | | | |
| LNAV MDA | 580-1 577 (600-1) | | 580-1⅝ 577 (600-1⅝) | |
| CIRCLING | 580-1 577 (600-1) | | 620-1¾ 617 (700-1¾) | 620-2 617 (700-2) |

MIRL Rwy 9-27 L
REIL Rwys 9 and 27 L



SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026