RNAV (GPS) RWY 23

TERRE HAUTE RGNL (HUF)


WAAS	APP CRS	Rwy Ldg	9020
CH 72625	229°	TDZE	582
W23A		Apt Elev	589

RNP APCH.


T A ASR Baro-VNAV and VDP NA when using Paris altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Paris altimeter setting and increase all DA 61 feet and all MDA 80 feet, increase LPV and LNAV/VNAV visibility all Cats ⅛ SM, increase LNAV and Circling Cats C/D visibilities ¼ SM.


MISSED APPROACH: Climb to 2600 direct POKHY and hold.

ATIS	HULMAN APP CON	HULMAN TOWER	GND CON
127.5 269.375	125.45 339.8	134.725 322.475	121.6 348.6

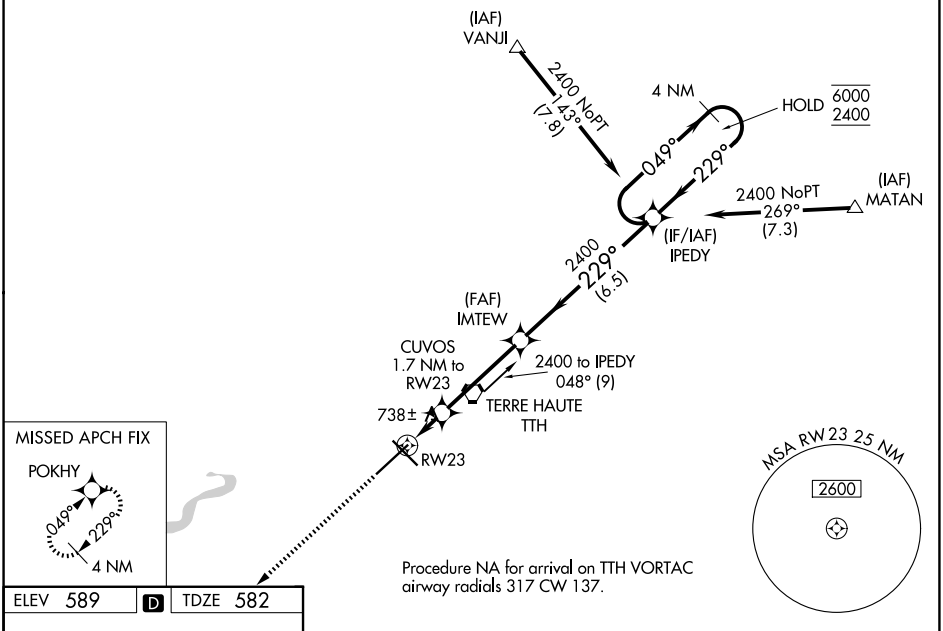

ELEV 589 D TDZE 582



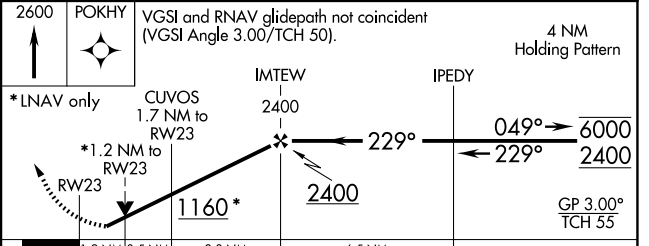

CATEGORY	A	B	C	D
LPV DA	890-⅞ 308 (400-⅞)			
LNAV/VNAV DA	874-⅞ 292 (300-⅞)			
LNAV MDA	1000-1 418 (500-1)		1000-1⅛ 418 (500-1⅛)	
CIRCLING	1040-1 451 (500-1)		1220-1¾ 631 (700-1¾)	1220-2 631 (700-2)

HIRL Rwys 5-23 and 14-32
REIL Rwys 14, 23 and 32

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026