RNAV (RNP) Z RWY 29

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)


APP CRS	Rwy Ldg	9800
287°	TDZE	2
	Apt Elev	4

For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS Required.


MALSR

MISSED APPROACH: Climb to 3000 on track 286° to LETSE and on track 291° to RQR VOR/DME and hold.

D-ATIS	NEW ORLEANS APP CON	NEW ORLEANS TOWER	GND CON
127.55	125.5 350.35 (W) 133.15 290.3 (E)	119.5 254.3	121.9 273.525

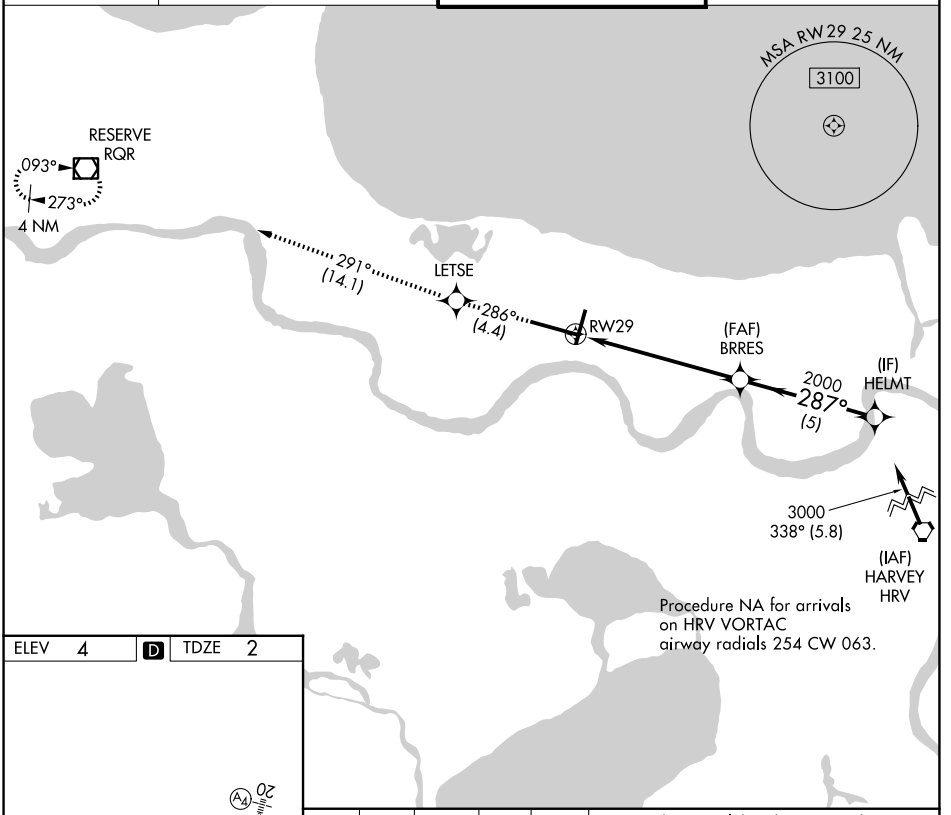


ELEV 4 | D | TDZE 2



RLLS Rwy 2
TDZ/CL Rwy 11
HIRL All Runways

3000	tr 286°	LETSE	tr 291°	RQR

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).

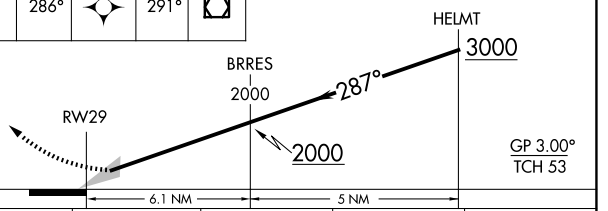

CATEGORY	A	B	C	D
RNP 0.30 DA	382/40	380 (400-¾)		

AUTHORIZATION REQUIRED

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026