WAAS	APP CRS	Rwy Ldg	9800
CH 61319	106°	TDZE	3
W11A		Apt Elev	3

RNAV (GPS) Y RWY 11

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C . For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000.


ALSF-2

MISSED APPROACH: Climb to 2000 direct ZUBEL and on track 195° to SAFES and hold.


D-ATIS	NEW ORLEANS APP CON	NEW ORLEANS TOWER	GND CON
127.55	125.5 350.35 (W) 133.15 290.3 (E)	119.5 254.3	121.9 273.525

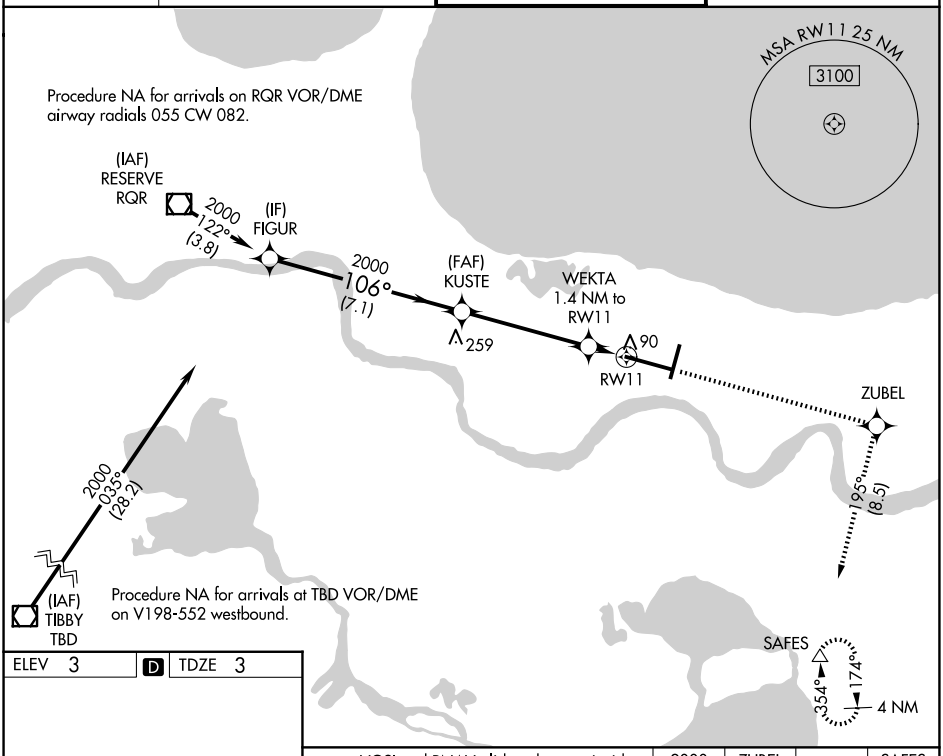

ELEV 3 | D | TDZE 3



RLLS Rwy 2
TDZ/CL Rwy 11
HIRL All Runways

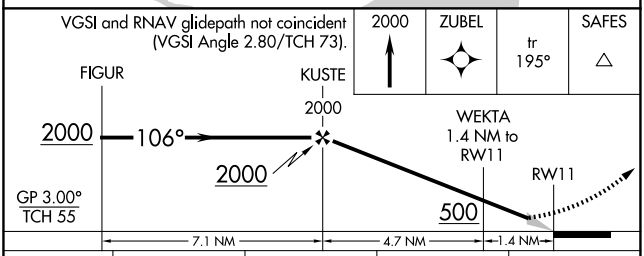

CATEGORY	A	B	C	D
LPV DA	203/18 200 (200-½)			
LNAV/VNAV DA	253/24 250 (300-½)			
LNAV MDA	340/24 337 (400-½)		340/26 337 (400-½)	
CIRCLING	520-1 517 (600-1)	540-1 537 (600-1)	580-1½ 577 (600-1½)	580-2 577 (600-2)

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026