WAAS CH 49006 W29A	APP CRS 287°	Rwy Ldg 9800 / TDZE 2 / Apt Elev 3

RNAV (GPS) Y RWY 29

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5000 and LNAV Cat C/D visibility to 1⅜ SM.
* RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 3000 direct LETSE and on track 291° to RQR VOR/DME and hold.


D-ATIS	NEW ORLEANS APP CON	NEW ORLEANS TOWER	GND CON
127.55	125.5 350.35 (W) 133.15 290.3 (E)	119.5 254.3	121.9 273.525

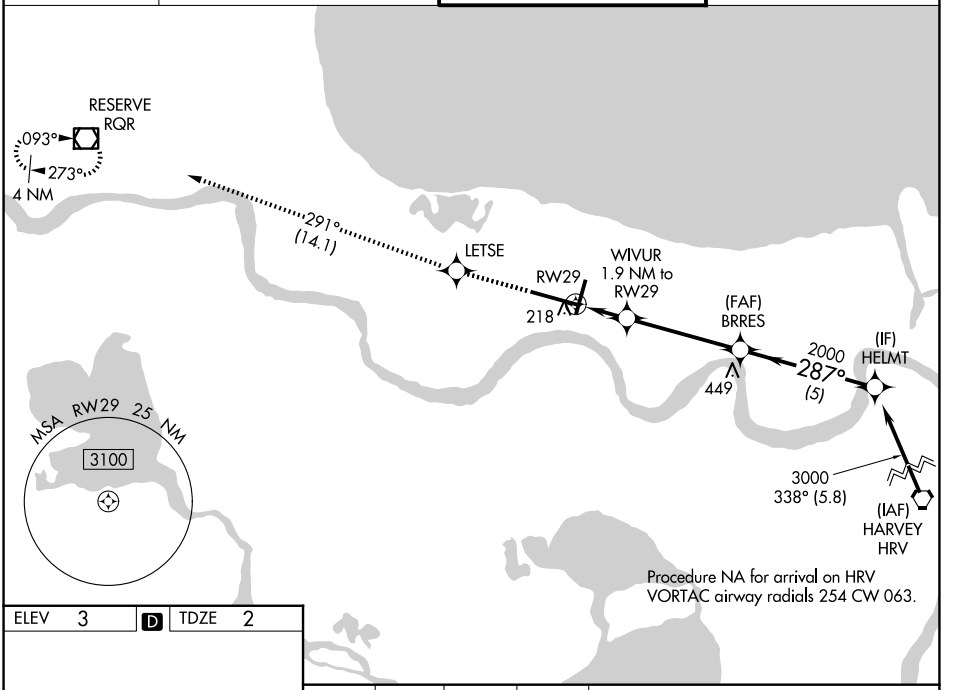

ELEV 3 D TDZE 2



RLLS Rwy 2
TDZ/CL Rwy 11
HIRL All Runways

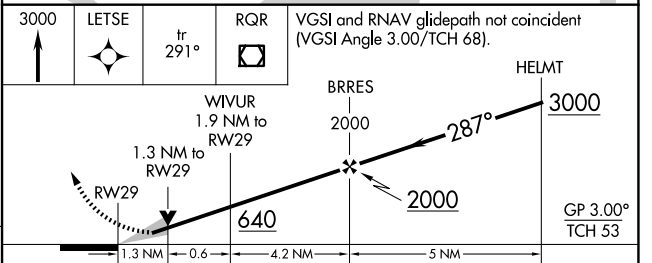

CATEGORY	A	B	C	D
LPV DA *	202/24 200 (200-½)			
LNAV/VNAV DA	380/35 378 (400-⅝)			
LNAV MDA	480/24 478 (500-½)		480/50 478 (500-1)	
CIRCLING	520-1 517 (600-1)	540-1 537 (600-1)	580-1½ 577 (600-1½)	580-2 577 (600-2)

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026