ILS Y or LOC Y RWY 28

NIAGARA FALLS INTL (IAG)

LOC I-IAG	APP CRS	Rwy Ldg	9129
110.1	280°	TDZE	588
		Apt Elev	592


ADF required.


T Rwy 28 helicopter visibility reduction below RVR 4000 NA.
A Circling Rwy 6 NA at night.
Circling NA for Cat E southeast of Rwy 6-24.
Inop table does not apply to S-ILS 28 all Cats.
For inop ALS, increase S-LOC 28 visibility Cats A/B to RVR 5500, Cats C/D/E to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.

ATIS	BUFFALO APP CON	NIAGARA TOWER ★	GND CON	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) L 349.0	125.3 275.8	122.95

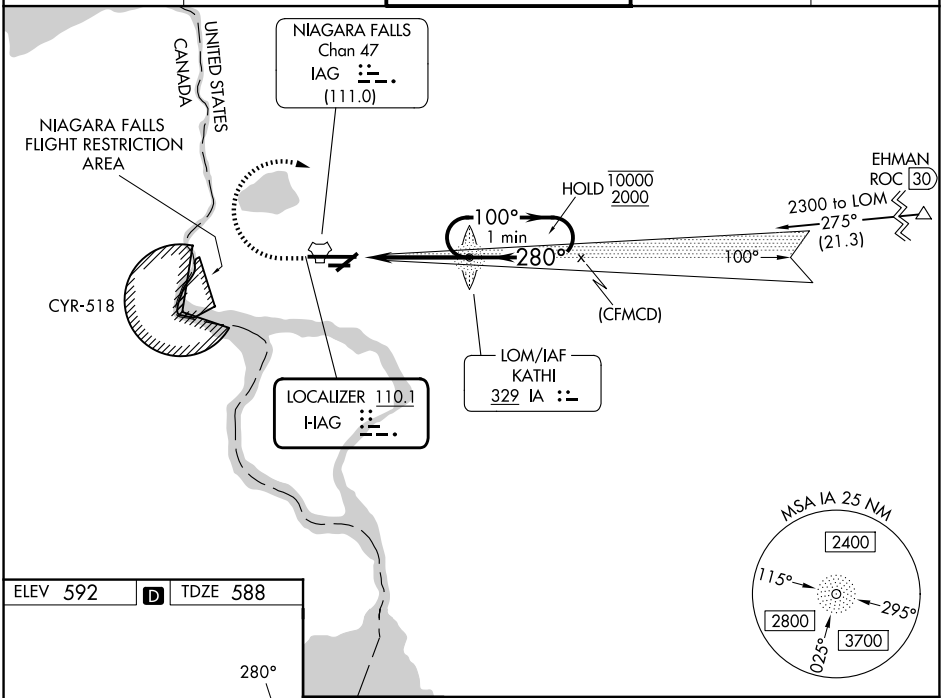




REIL Rwys 6 and 24 L
TDZL/RCLS Rwy 28 L
RCLS Rwy 10 L
HIRL Rwy 10-28 L
MIRL Rwy 6-24 L

FAF to MAP 4.1 NM

Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

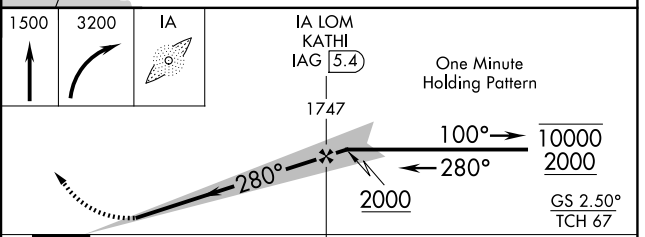

CATEGORY	A	B	C	D	E
S-ILS 28	838/40 250 (300-¾)				
S-LOC 28	1080/40 492 (500-¾)		1080/50 492 (500-1)		
CIRCLING	1100-1 508 (600-1)		1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	1280-2½ 688 (700-2½)

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026