ILS Z or LOC Z RWY 28

NIAGARA FALLS INTL (IAG)

LOC I-IAG	APP CRS	Rwy Ldg	9129
110.1	280°	TDZE	588
		Apt Elev	592


ADF required. DME required.


Circling Rwy 6 NA at night. Rwy 28 helicopter visibility reduction below RVR 4000 NA. Circling NA for Cat E southeast of Rwy 6-24. Inop table does not apply to S-ILS 28 all Cats. For inop ALS, increase S-LOC 28 visibility Cats A/B RVR 5500, Cats C/D/E 1⅜ SM.

MALSR


MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 on heading 150° and KATHI LOM BRG-100 to DIONE/IAG 12 DME and hold.

ATIS	BUFFALO APP CON	NIAGARA TOWER ★	GND CON	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) L 349.0	125.3 275.8	122.95

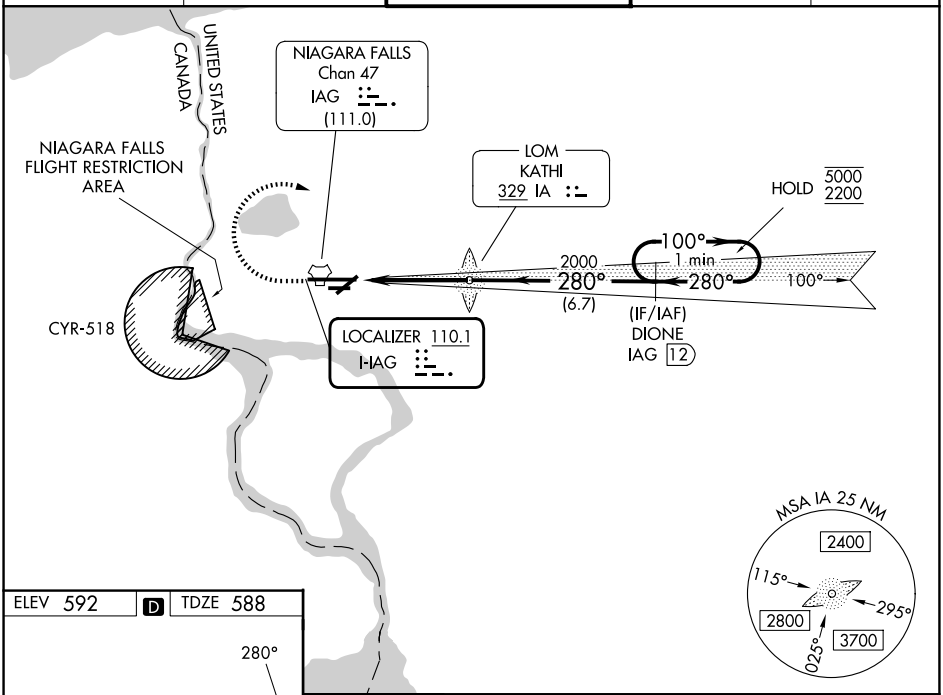



1500	3200	IA	DIONE IAG 12
↑	hdg 150°	100°	

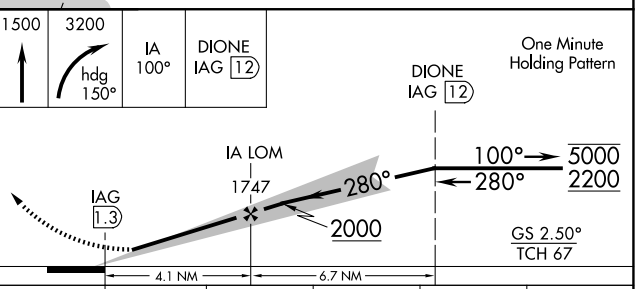

CATEGORY	A	B	C	D	E
S-ILS 28	838/40	250 (300-¾)			
S-LOC 28	1080/40	492 (500-¾)	1080/50	492 (500-1)	
CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	1280-2½ 688 (700-2½)

REIL Rwys 6 and 24 L
TDZL/RCLS Rwy 28
HIRL Rwy 10-28 L
MIRL Rwy 6-24 L

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026