RNAV (GPS) RWY 28

NIAGARA FALLS INTL (IAG)

WAAS	APP CRS	Rwy Ldg	9129
CH 63147	280°	TDZE	588
W28A		Apt Elev	592


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.
Rwy 28 helicopter visibility reduction below RVR 4000 not authorized.
Circling Rwy 6 NA at night.
Circling NA for Cat E southeast of Rwy 6-24.
Inop table does not apply to LPV all Cats.
For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 4500, LNAV visibility all Cats to RVR 5500.


MALSR


MISSED APPROACH: Climb to 1040 then climbing right turn to 3600 direct ZUPUV and hold, continue climb-in-hold to 3600.

ATIS	BUFFALO APP CON	NIAGARA TOWER ★	GND CON	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) L 349.0	125.3 275.8	122.95

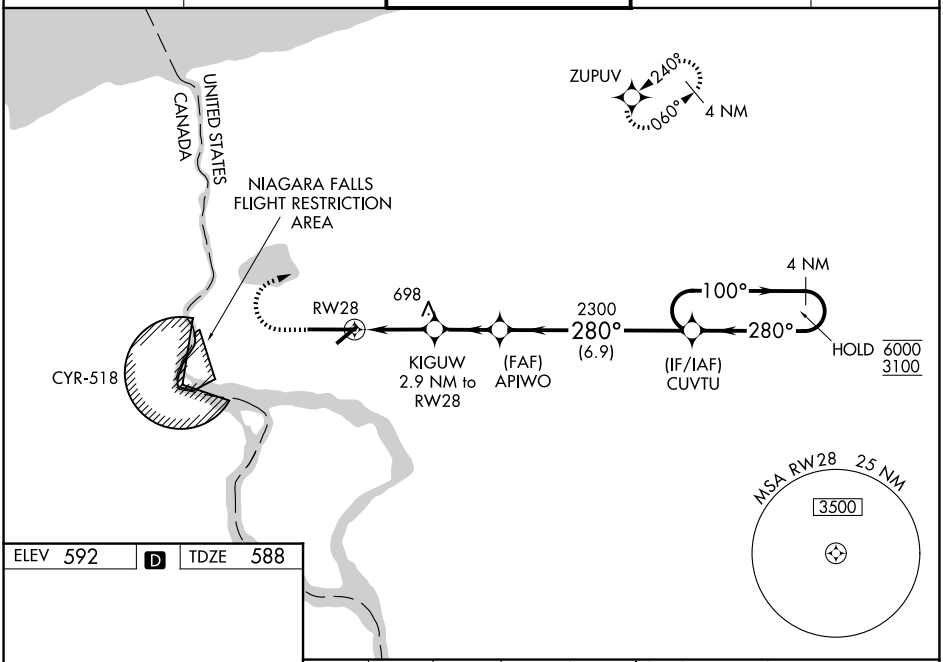

ELEV 592 D TDZE 588



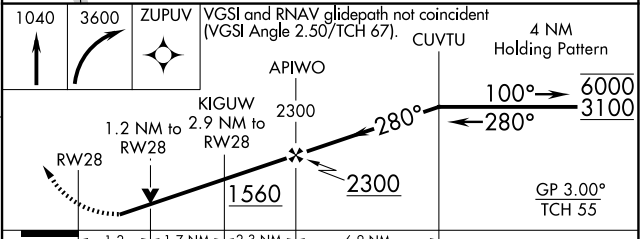

CATEGORY	A	B	C	D	E
LPV DA	838/40 250 (300-¾)				
LNAV/VNAV DA	957/40 369 (400-¾)				
LNAV MDA	960/40 372 (400-¾)				
CIRCLING	1100-1 508 (600-1)		1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	1280-2½ 688 (700-2½)

REIL Rwys 6 and 24 L
TDZL/RCLS Rwy 28 L
RCLS Rwy 10 L
HIRL Rwy 10-28 L
MIRL Rwy 6-24 L

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026