TACAN RWY 28

NIAGARA FALLS INTL (IAG)


TACAN IAG Chan 47 (111.0)	APP CRS 286°	Rwy Ldg 9129 TDZE 588 Apt Elev 592

Rwy 28 helicopter visibility reduction below RVR 4000 NA. Circling NA for Cat E southeast of Rwy 6-24. For inop ALS, increase visibility Cats A/B to RVR 5500, Cats C/D/E to 1⅜ SM.


MALSR

MISSED APPROACH: Climbing right turn to 3000 on heading 100° and IAG TACAN R-084 to EDUSE/IAG 15.3 DME and hold, continue climb-in-hold to 3000.

ATIS	BUFFALO APP CON	NIAGARA TOWER ★	GND CON	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) L 349.0	125.3 275.8	122.95

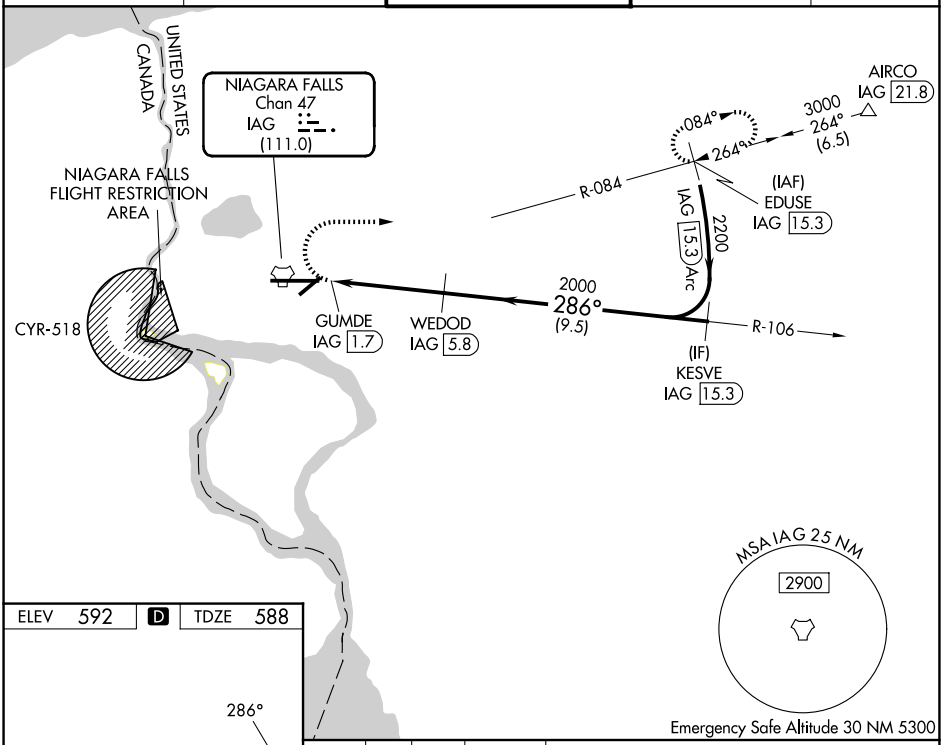


ELEV 592 D TDZE 588



REIL Rwys 6 and 24 L
TDZL/RCLS Rwy 28 L
RCLS Rwy 10 L
HIRL Rwy 10-28 L
MIRL Rwy 6-24 L

3000	hdg 100°	IAG R-084	EDUSE IAG 15.3

VGSI and descent angles not coincident (VGSI Angle 2.50/TCH 67).

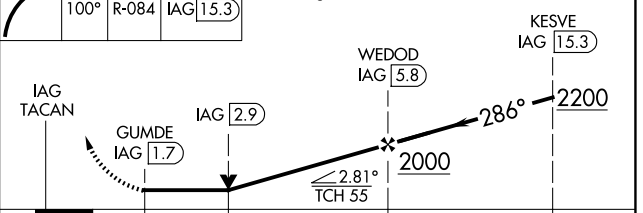

CATEGORY	A	B	C	D	E
S-28	1080/40	492 (500-¾)	1080/50	492 (500-1)	
CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	1280-2½ 688 (700-2½)

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026