RNAV (GPS) RWY 4

TYLER POUNDS RGNL (TYR)

WAAS CH 40014 W04A	APP CRS 042°	Rwy Ldg 7734 / TDZE 542 / Apt Elev 544


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅛ SM, LNAV all Cats visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 2500 direct OTTIF and hold.


ATIS	LONGVIEW APP CON ★	POUNDS TOWER ★	GND CON	UNICOM
126.25	128.75 379.15	120.1 (CTAF) L 257.8	121.9	122.95

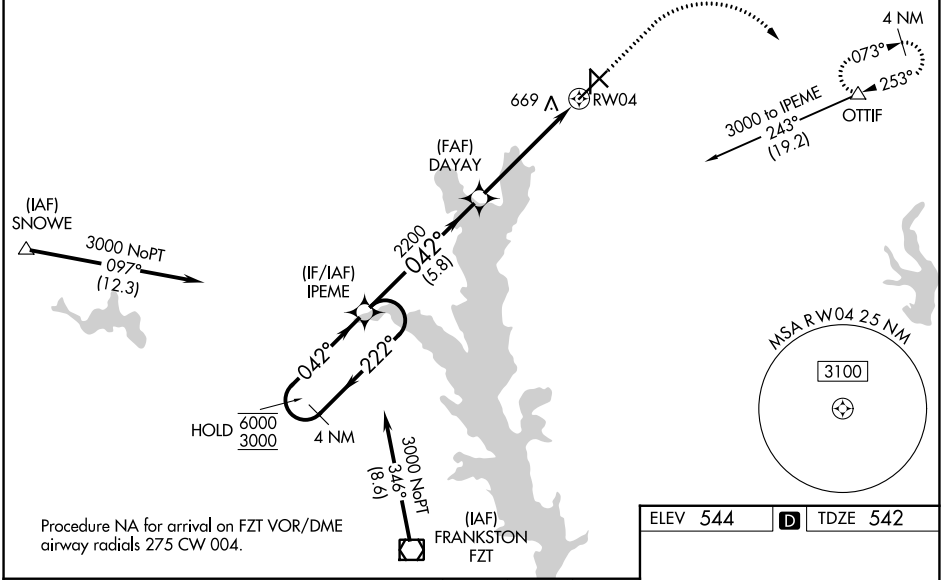

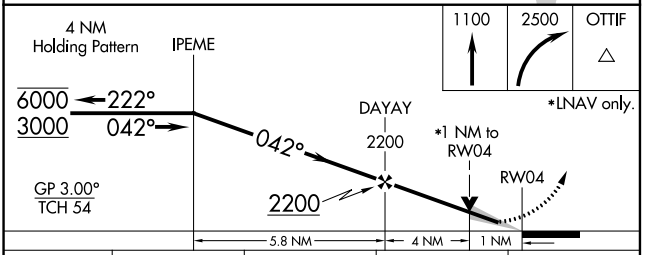

CATEGORY	A	B	C	D
LPV DA	742-½ 200 (200-½)			
LNAV/VNAV DA	943-¾ 401 (400-¾)			
LNAV MDA	920-½ 378 (400-½)		920-⅝ 378 (400-⅝)	
CIRCLING	980-1 436 (500-1)	1020-1 476 (500-1)	1160-1¾ 616 (700-1¾)	1280-2¼ 736 (800-2¼)

ELEV 544 D TDZE 542

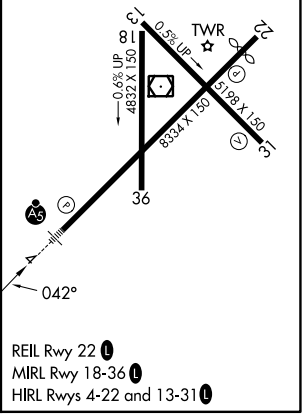

REIL Rwy 22 L
MIRL Rwy 18-36 L
HIRL Rwys 4-22 and 13-31 L

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026