ILS or LOC RWY 19

AKRON-CANTON RGNL (CAK)

LOC I-RGO	APP CRS	Rwy Ldg	7000
109.5	189°	TDZE	1218
		Apt Elev	1226


T ZEVLO fix minimums: For inop ALS, increase S-LOC 19 Cat C and D visibility to RVR 5500. For inop ALS, increase S-LOC 19 Cat C and D visibility to RVR 6000. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct BSV VOR/DME and hold.

ATIS	CLEVELAND APP CON	AKRON-CANTON TOWER	GND CON
121.05	125.5 269.25	134.75 279.575	121.7 348.6


CAUTION: OM for Akron Intl may be received approximately 5 miles north of DERBY OM.

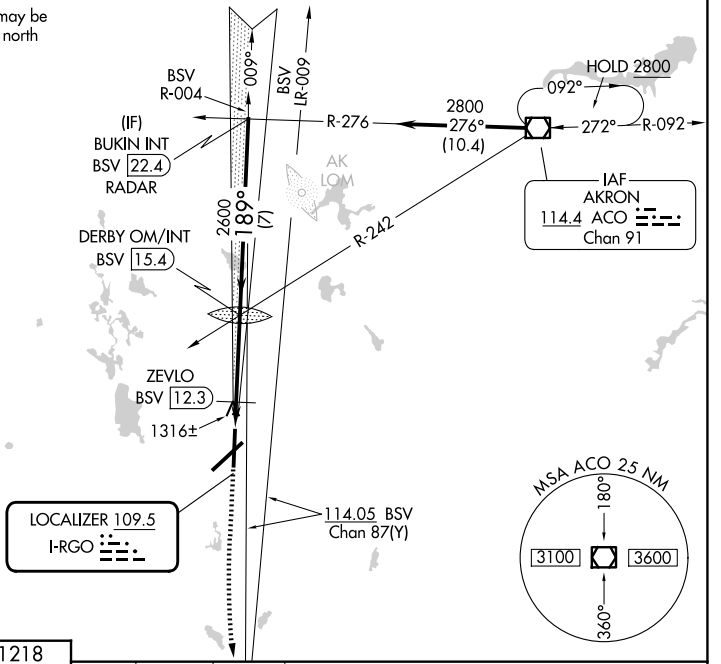


ALTERNATE MISSED APCH FIX



MISSED APCH FIX




ELEV 1226 D TDZE 1218

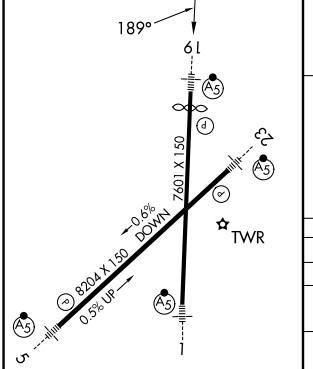

HIRL Rwys 1-19 and 5-23

FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

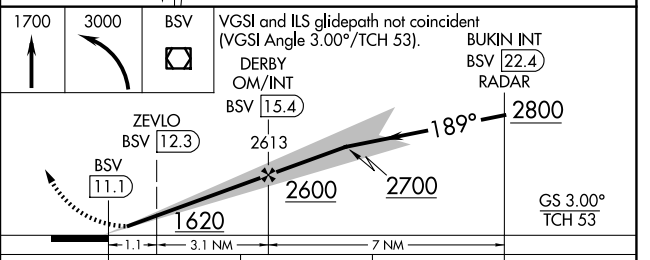

CATEGORY	A	B	C	D
S-ILS 19*	1418/24 200 (200-½)			
S-LOC 19	1620/24 402 (400-½)		1620/40 402 (400-¾)	
CIRCLING	1760-1 534 (600-1)		1780-1½ 554 (600-1½)	1800-2 574 (600-2)
ZEVLO FIX MINIMUMS (DME REQUIRED)				
S-LOC 19	1580/24 362 (400-½)		1580/35 362 (400-⅝)	
CIRCLING	1760-1 534 (600-1)		1780-1½ 554 (600-1½)	1800-2 574 (600-2)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026