RNAV (GPS) RWY 19

AKRON-CANTON RGNL (CAK)

WAAS	APP CRS	Rwy Ldg	7000
CH 58020	189°	TDZE	1218
W19A		Apt Elev	1226


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM, and LNAV Cats C and D to 1⅜ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 3000 direct HOMEV and on track 184° to BSV VOR/DME and hold.

ATIS	CLEVELAND APP CON*	AKRON-CANTON TOWER	GND CON
121.05	125.5 269.25	134.75 279.575	121.7 348.6

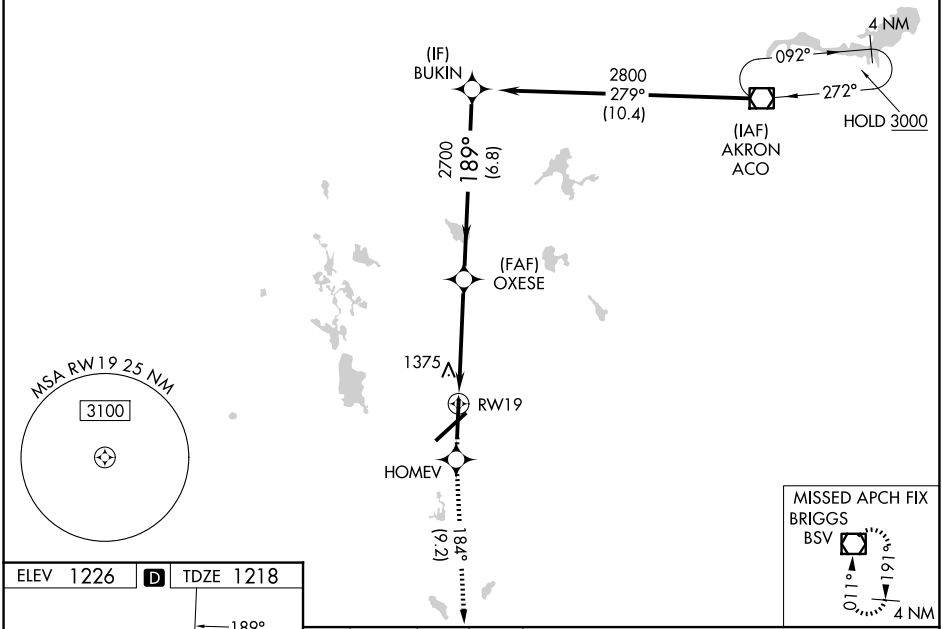

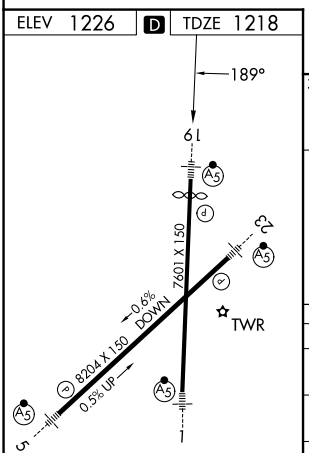

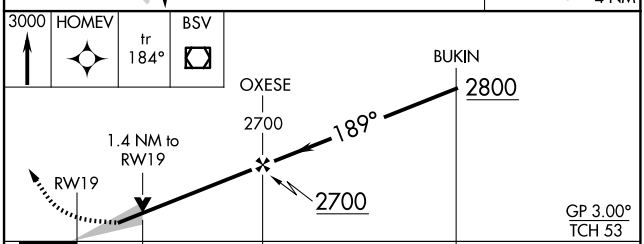

CATEGORY	A	B	C	D
LPV DA *	1418/24 200 (200-½)			
LNAV/VNAV DA	1700/50 482 (500-1)			
LNAV MDA	1700/24 482 (500-½)		1700/50 482 (500-1)	
CIRCLING	1760-1 534 (600-1)		1780-1½ 554 (600-1½)	1800-2 574 (600-2)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026