WAAS CH 72605 W32A	APP CRS 319°	Rwy Ldg 7510 TDZE 27 Apt Elev 30

RNAV (GPS) RWY 32

SARASOTA/BRADENTON INTL (SRQ)


RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When control tower closed, LPV and LNAV/VNAV NA; increase LNAV all Cats visibility to 1 mile. When control tower closed, inop table does not apply to LNAV Cats A and B. When control tower closed, for inop MALSR, increase LNAV Cat C and D visibility to 1⅛ mile.


MALSR

MISSED APPROACH: Climb to 3000 direct ACIPU and on track 047° to PAIRS and hold, continue climb-in-hold to 3000.

ATIS	TAMPA APP CON	SARASOTA TOWER ★	GND CON	UNICOM
124.375	119.65 353.575	120.1 (CTAF) L 256.8	121.9 273.6	122.95

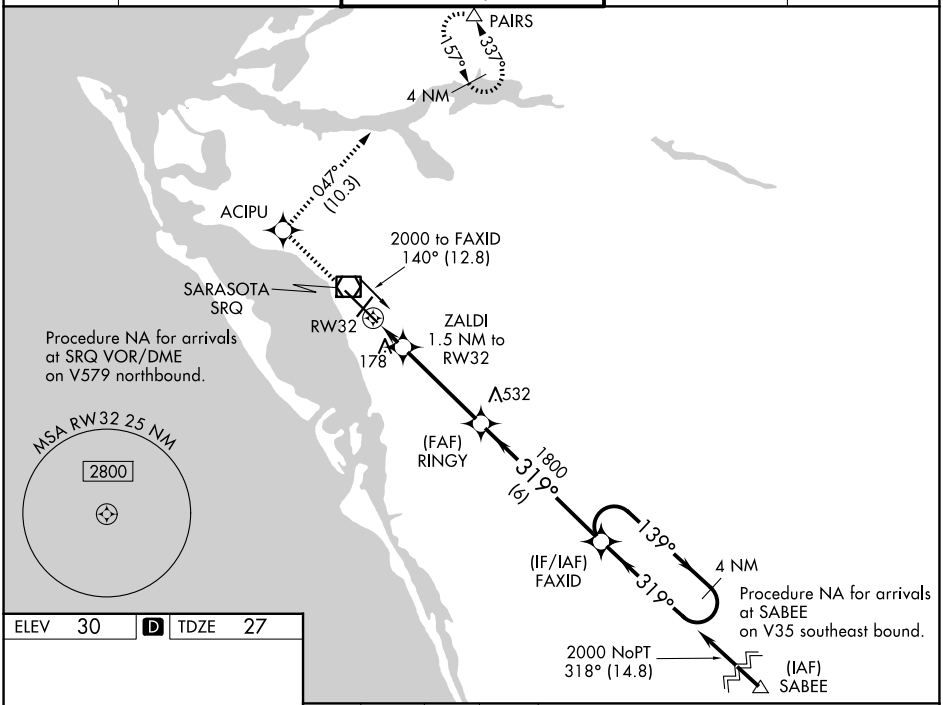

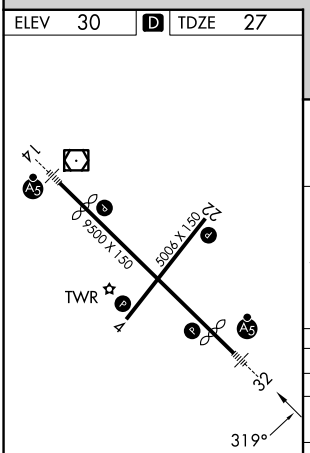

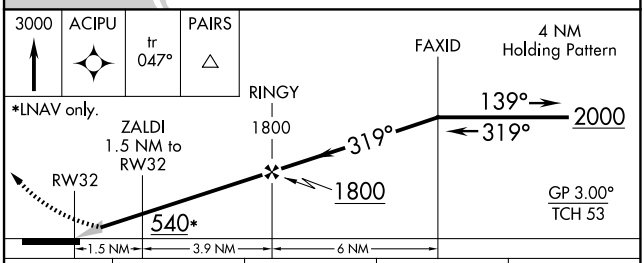

CATEGORY	A	B	C	D
LPV DA	227-½ 200 (200-½)			
LNAV/VNAV DA	463-1 436 (500-1)			
LNAV MDA	440-½ 413 (500-½)		440-¾ 413 (500-¾)	
CIRCLING	500-1 470 (500-1)		600-1½ 570 (600-1½)	600-2 570 (600-2)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026