LOC I-MOD	APP CRS	Rwy Ldg	5904
111.9	288°	TDZE	91
		Apt Elev	99

ILS or LOC RWY 28R

MODESTO CITY-COUNTY-HARRY SHAM FLD (MOD)


DME required for LOC only.

Autopilot coupled approach NA below 1080. Circling Rwy 10R, 28L NA at night. DME from MOD VOR/DME. DME use requires simultaneous reception of I-MOD and MOD DME. For inop ALS, increase S-LOC 28R Cats C and D visibility to 1⅜ SM.


MALSR


MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct MOD VOR/DME and hold, continue climb-in-hold to 2000.

ATIS	NORCAL APP CON	MODESTO TOWER ★	GND CON	UNICOM
127.7	120.95 269.45	125.3 (CTAF) L 257.8	121.7	122.95

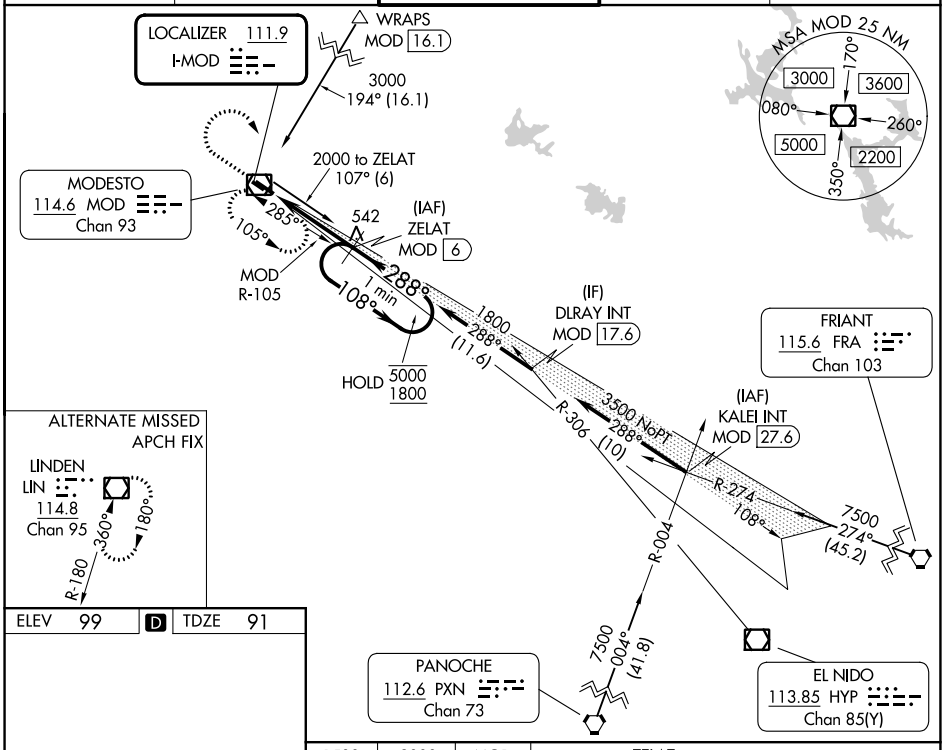

ELEV 99 D TDZE 91



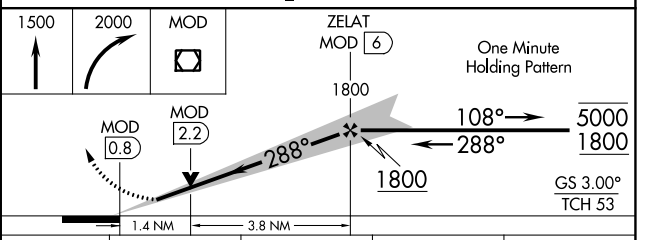

CATEGORY	A	B	C	D
S-ILS 28R	341-½ 250 (300-½)			
S-LOC 28R	580-½ 489 (500-½)		580-1 489 (500-1)	
CIRCLING	580-1 481 (500-1)	600-1 501 (600-1)	640-1½ 541 (600-1½)	820-2¼ 721 (800-2¼)

REIL Rwy 10L L
MIRL Rwy 10R-28L
HIRL Rwy 10L-28R L

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026