RNAV (GPS) RWY 23

NEW BEDFORD RGNL (EWB)

WAAS CH 65638 W23A	APP CRS 235°	Rwy Ldg 5000 / TDZE 78 / Apt Elev 79


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA. Circling Rwy 14 NA at night. For inop ALS, increase LPV all Cats visibility to ⅞ mile, increase LNAV/VNAV all Cats and LNAV Cats A/B visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 2100 direct BONNI and hold.

ATIS	PROVIDENCE APP CON★	NEW BEDFORD TOWER★	GND CON	UNICOM
126.85	128.7 269.525	118.1 (CTAF) L 239.0	121.9	122.95

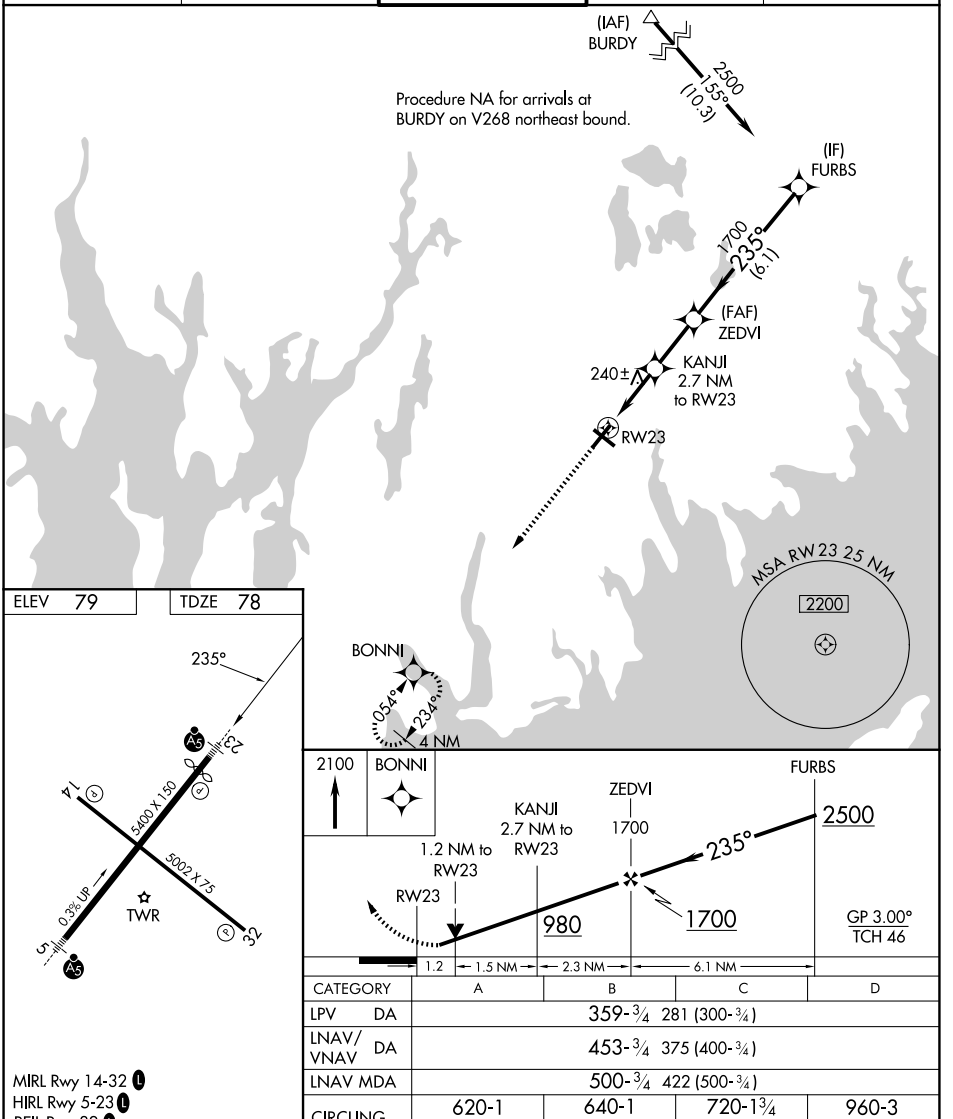

CATEGORY	A	B	C	D
LPV DA	359-¾ 281 (300-¾)			
LNAV/VNAV DA	453-¾ 375 (400-¾)			
LNAV MDA	500-¾ 422 (500-¾)			
CIRCLING	620-1 541 (600-1)	640-1 561 (600-1)	720-1¾ 641 (700-1¾)	960-3 881 (900-3)

MIRL Rwy 14-32 L
HIRL Rwy 5-23 L
REIL Rwy 32 L

NE-1, 29 OCT 2026 to 26 NOV 2026
NE-1, 29 OCT 2026 to 26 NOV 2026