RNAV (GPS) RWY 5

NEW BEDFORD RGNL (EWB)

WAAS	APP CRS	Rwy Ldg	5400
CH 60938	054°	TDZE	70
W05A		Apt Elev	79


RNP APCH - GPS.


T A — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Circling Rwy 14 NA at night. For inop ALS, increase LNAV/ VNAV all Cats and LNAV Cat C/D visibility to 1⅜ SM.

MALSR


MISSED APPROACH: (Do not exceed 235K until BONNI) climb to 700 then climbing left turn to 2100 direct BONNI and hold.

ATIS	PROVIDENCE APP CON★	NEW BEDFORD TOWER★	GND CON	UNICOM
126.85	128.7 269.525	118.1 (CTAF) L 239.0	121.9	122.95

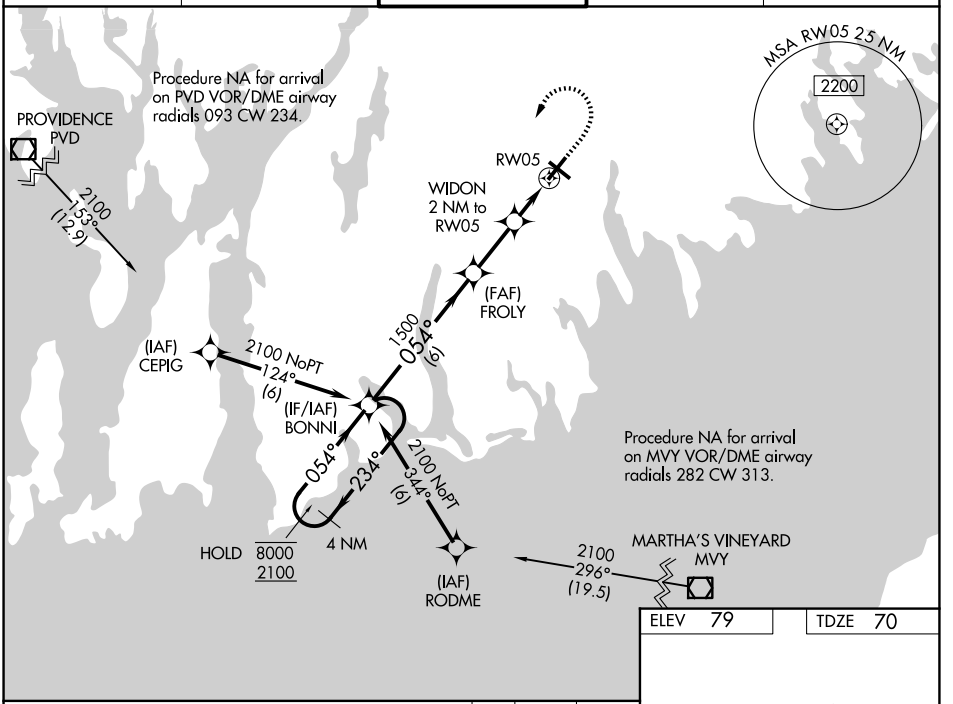

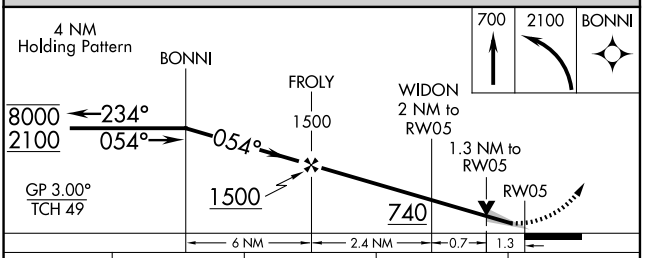

CATEGORY	A	B	C	D
LPV DA	285/24	215 (300-½)		
LNAV/ VNAV DA	540/50	470 (500-1)		
LNAV MDA	540/24	470 (500-½)	540/50	470 (500-1)
CIRCLING	620-1 541 (600-1)	640-1 561 (600-1)	720-1¾ 641 (700-1¾)	960-3 881 (900-3)



MIRL Rwy 14-32 L
HIRL Rwy 5-23 L
REIL Rwy 32 L

NE-1, 29 OCT 2026 to 26 NOV 2026
NE-1, 29 OCT 2026 to 26 NOV 2026