WAAS CH 77906 W03A	APP CRS 030°	Rwy Ldg 6780 TDZE 830 Apt Elev 859

RNAV (GPS) RWY 3

MID-OHIO VALLEY RGNL (PKB)


RNP APCH.


Circling Rwy 10, 28 NA at night. Rwy 3 helicopter visibility reduction below RVR 4000 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 38°C.
When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1302 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1436 feet and visibility all Cats ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ½ SM.
For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cats A/B visibility to RVR 5500. For inop ALS, when using Athens/Albany altimeter setting, increase LPV all Cats visibility to 1⅜ SM and LNAV/VNAV all Cats visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct OWAVE and hold.


ATIS	INDIANAPOLIS CENTER	PARKERSBURG TOWER ★	GND CON	UNICOM
124.35	125.55 317.475	123.7 (CTAF) L 257.8	126.45	122.95

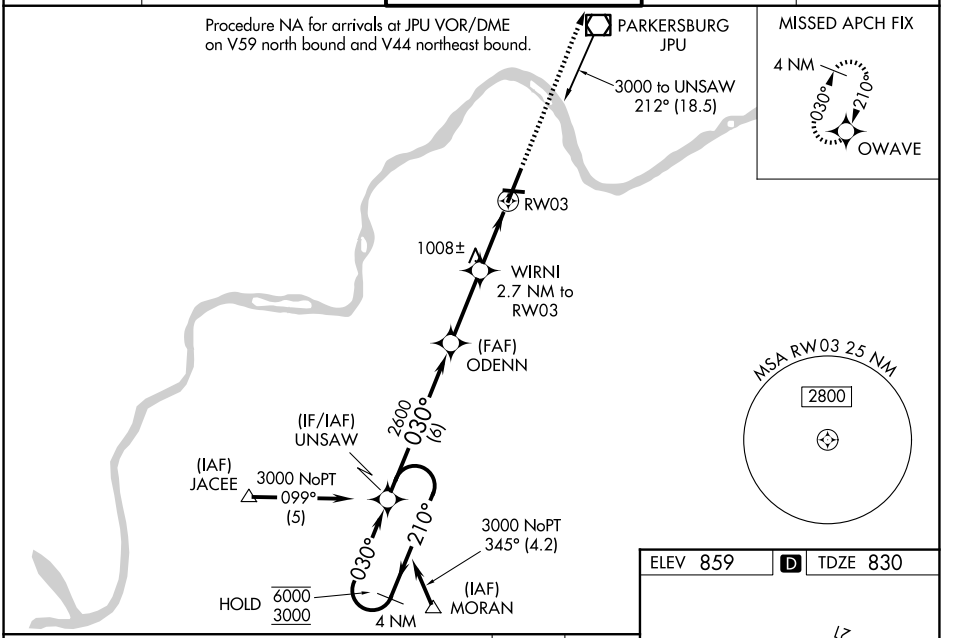

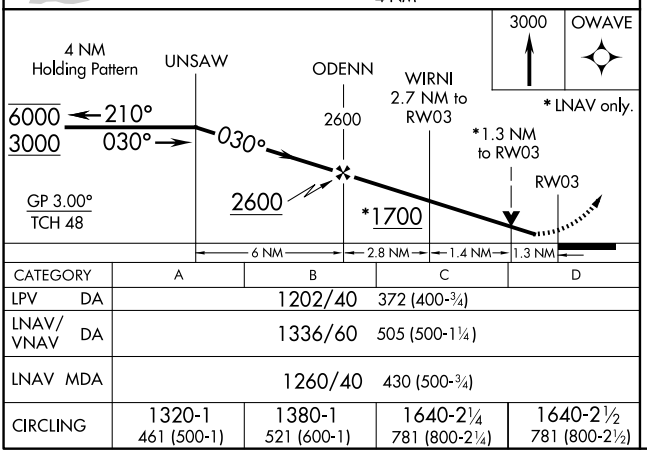

CATEGORY	A	B	C	D
LPV DA	1202/40		372 (400-¾)	
LNAV/VNAV DA	1336/60		505 (500-1¼)	
LNAV MDA	1260/40		430 (500-¾)	
CIRCLING	1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)

ELEV 859 D TDZE 830

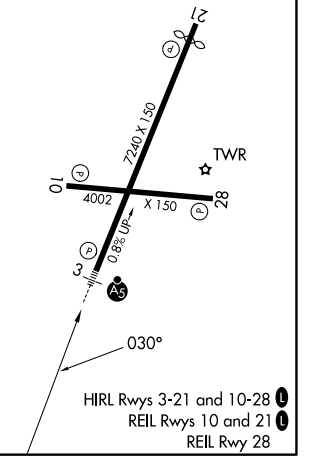

NE-4, 29 OCT 2026 to 26 NOV 2026
NE-4, 29 OCT 2026 to 26 NOV 2026