WAAS CH 45513 W13A	APP CRS 128°	Rwy Ldg 10001 TDZE 75 Apt Elev 75

RNAV (GPS) Y RWY 13

ATLANTIC CITY INTL (ACY)


RNP APCH - GPS.

For inoperative MALSR, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½, and LNAV Cat D visibility to RVR 6000, Cat E visibility to 1½. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).


MALSR

MISSED APPROACH: Climb to 2000 direct JURAD and on track 076° to RODDI and hold.

ATIS	ATLANTIC CITY APP CON	ATLANTIC CITY TOWER	GND CON
125.725 316.15	124.6 327.125	120.3 239.0	121.9 284.6

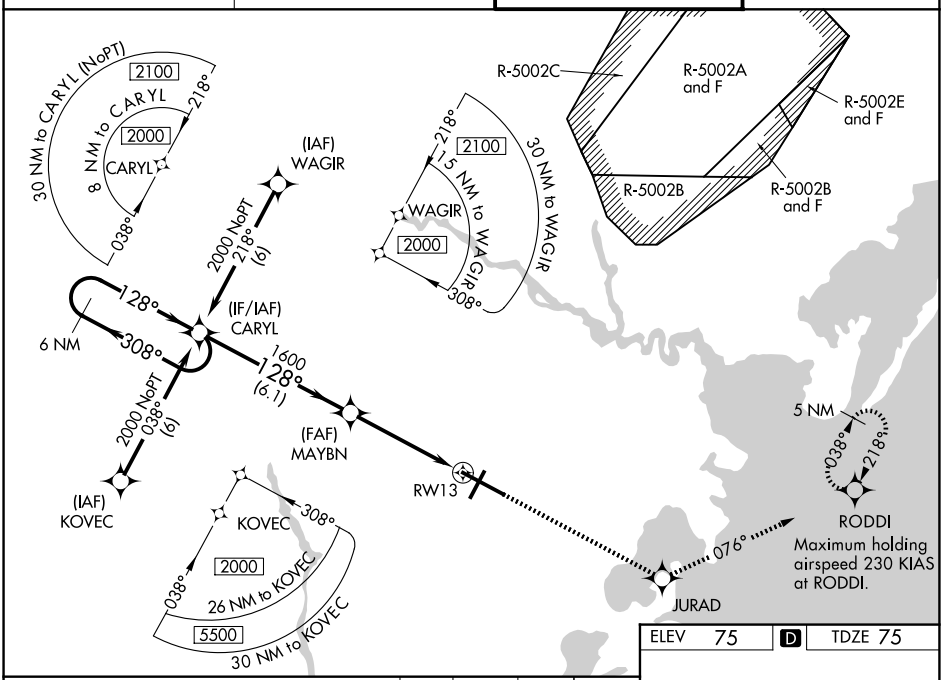


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).	2000	JURAD	tr 076°	RODDI

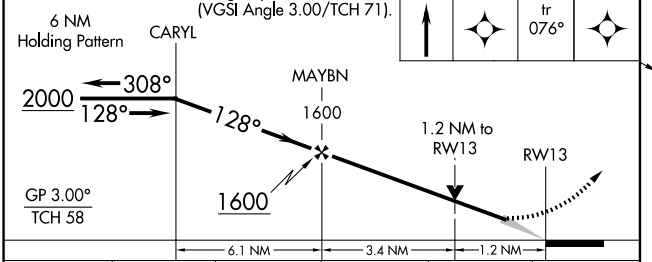

CATEGORY	A	B	C	D	E
LPV DA	275/18 200 (200-½)				
LNAV/VNAV DA	475/40 400 (400-¾)				475/50 400 (400-1)
LNAV MDA	520/24 445 (500-½)		520/45 445 (500-⅞)	520/50 445 (500-1)	
CIRCLING	540-1 465 (500-1)	600-1 525 (600-1)	620-1½ 545 (600-1½)	640-2 565 (600-2)	760-2½ 685 (700-2½)

ELEV 75 D TDZE 75



TDZL/RCLS Rwy 13
HIRL Rwys 4-22 and 13-31
REIL Rwy 31

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026