WAAS	APP CRS		
CH **87118**	**012°**	Rwy Ldg	**5000**
W01A		TDZE	**324**
		Apt Elev	**328**

RNAV (GPS) RWY 1

FLOYD BENNETT MEML (GFL)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Albany altimeter setting and increase all DA 91 feet and all MDA 100 feet; increase LNAV/VNAV all Cats ⅜ SM, LNAV Cat C/D and Circling Cat C visibility ¼ SM. For inoperative ALS when using Albany altimeter setting, increase LPV all Cats visibility to ⅞ SM. Baro-VNAV and VDP NA when using Albany altimeter setting. Circling Rwy 12, 30 NA at night. Rwy 12, 30 helicopter visibility reduction below 1 SM NA.

-18°C


MALSR


MISSED APPROACH: Climb to 900 then climbing right turn to 3500 direct EKAKE and hold.

ASOS	ALBANY APP CON	UNICOM
119.925	**132.825 307.2**	**123.0** (CTAF) L

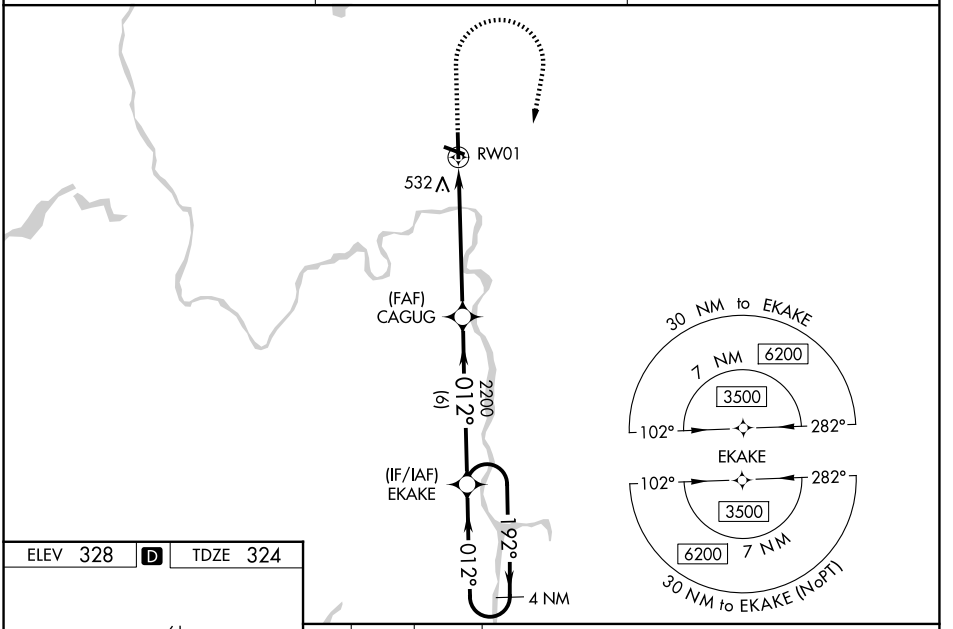

ELEV 328 D TDZE 324

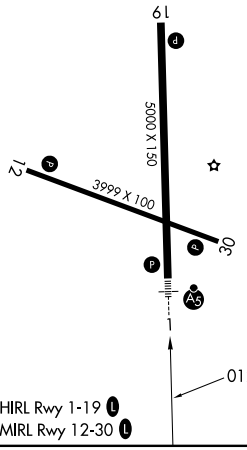

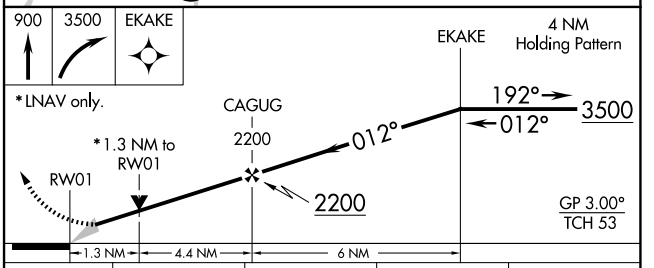

CATEGORY	A	B	C	D
LPV DA	524-½	200 (200-½)		
LNAV/VNAV DA	835-1¼	511 (600-1¼)		
LNAV MDA	800-½	476 (500-½)	800-1	476 (500-1)
CIRCLING	840-1 512 (600-1)	860-1 532 (600-1)	940-1¾ 612 (700-1¾)	1960-3 1632 (1700-3)

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026