RNAV (GPS) RWY 7

OXNARD (OXR)


WAAS CH 72623 W07A	APP CRS 075°	Rwy Ldg 5654 TDZE 37 Apt Elev 45


RNP APCH-GPS.

T A Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 305 feet, increase LNAV/VNAV DA to 337 feet; increase all MDAs 20 feet and Circling Cat C visibility ¼ SM.


MISSED APPROACH: Climb to 500, then climbing right turn to 3000 direct UVICA and hold.

ATIS	POINT MUGU APP CON★	OXNARD TOWER★	GND CON
118.05	124.7 335.5	134.95 (CTAF) L 257.8	121.9

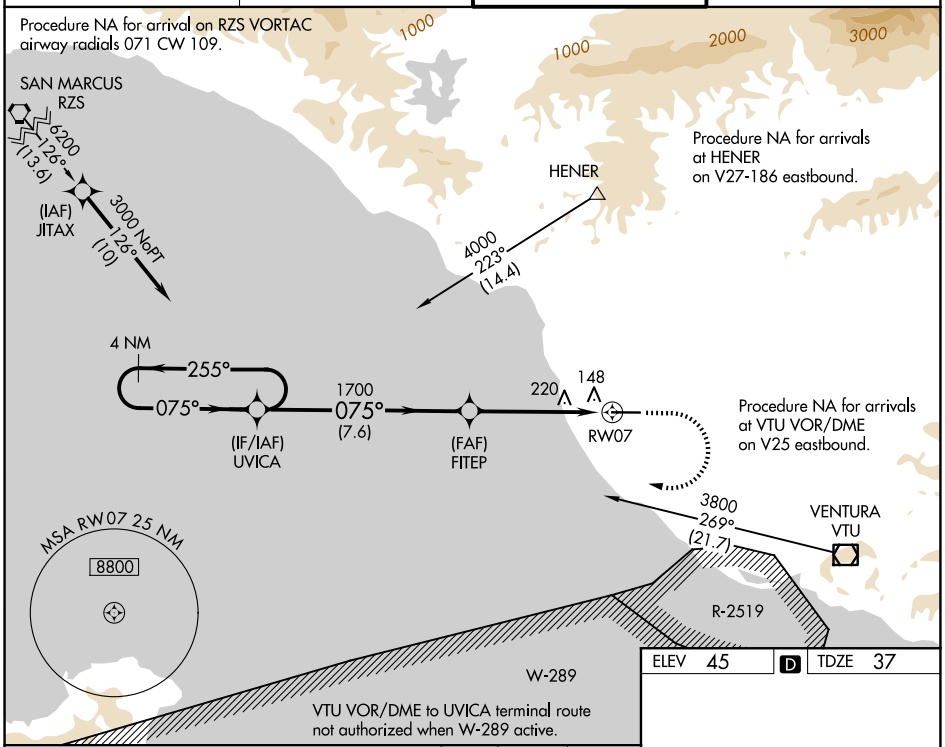

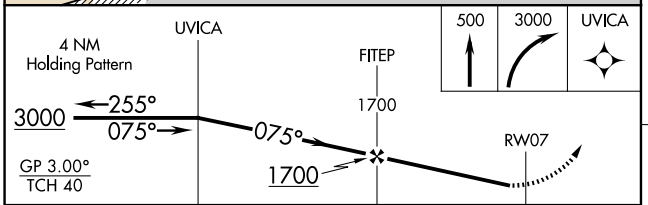

CATEGORY	A	B	C	D
LPV DA	287-1 250 (300-1)			
LNAV/VNAV DA	319-1 282 (300-1)			
LNAV MDA	480-1 443 (500-1)		480-1⅜ 443 (500-1⅜)	
CIRCLING	500-1 455 (500-1)	520-1 475 (500-1)	700-1¾ 655 (700-1¾)	760-2¼ 715 (800-2¼)



SW-3, 29 OCT 2026 to 26 NOV 2026
SW-3, 29 OCT 2026 to 26 NOV 2026