# RNAV (GPS) RWY 27

## PALATKA MUNI/LT KAY LARKIN FLD (28J)


| WAAS | APP CRS | Rwy Ldg | 5549 |
|---|---|---|---|
| CH 99320 | 272° | TDZE | 34 |
| W27A | | Apt Elev | 48 |

RNP APCH-GPS.


T A NA Baro-VNAV NA when using St. Augustine altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use St Augustine altimeter setting and increase LPV DA to 419 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 582 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM. Circling Rwy 17, 35 NA at night.

MISSED APPROACH: Climb to 3000 direct FIKUK and hold. Continue climb-in-hold to 3000.


| AWOS-3 | JACKSONVILLE APP CON | UNICOM |
|---|---|---|
| 119.925 | 118.175 338.25 | 122.8 (CTAF) L |

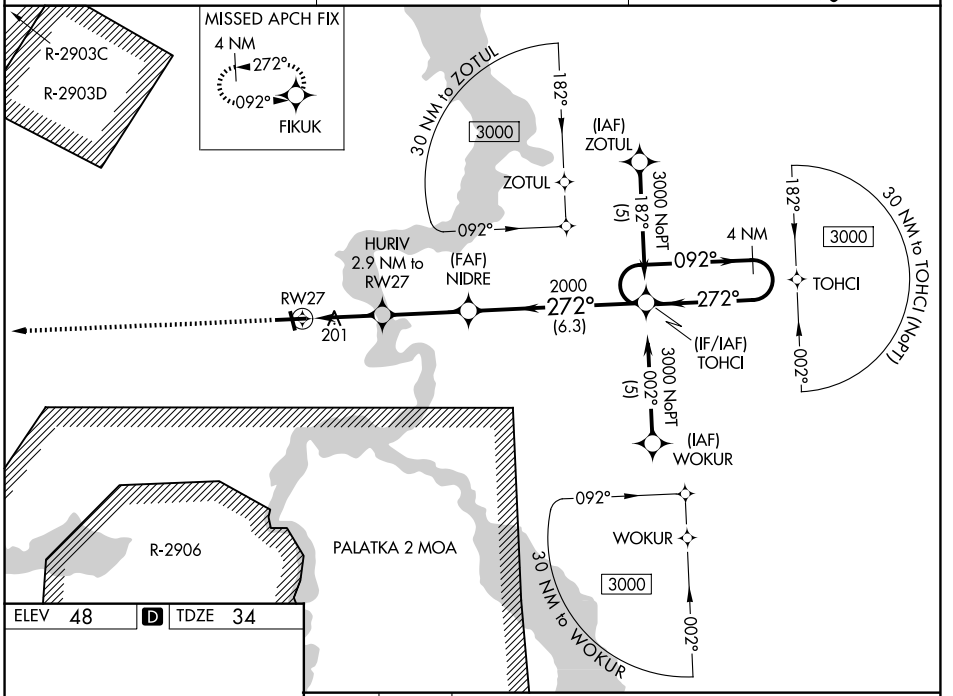


ELEV 48 D TDZE 34




REIL Rwys 9 and 27 L
MIRL Rwys 9-27 and 17-35 L

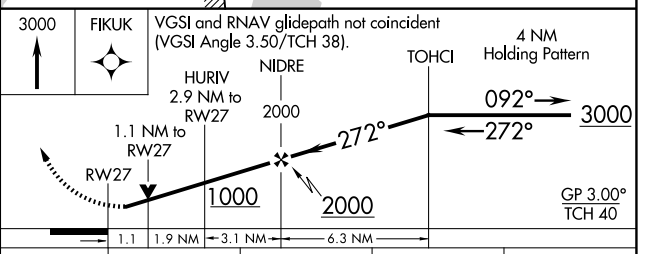


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 354-⅞ | 320 (400-⅞) | | |
| LNAV/VNAV DA | 517-1⅜ | 483 (500-1⅜) | | |
| LNAV MDA | 460-1 426 (500-1) | | 460-1¼ 426 (500-1¼) | 460-1¼ 426 (500-1¼) |
| CIRCLING | 620-1 572 (600-1) | | 700-1¾ 652 (700-1¾) | 700-2 652 (700-2) |



SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026