
WAAS	APP CRS	Rwy Ldg	8204
CH 42899	104°	TDZE	5516
W10A		Apt Elev	5516


RNAV (GPS) RWY 10
CENTRAL WYOMING RGNL (RIW)


T A DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lander altimeter setting and increase all DA 54 feet and all MDA 60 feet, and increase LPV and LNAV/VNAV all Cats visibility ¼ mile and increase LNAV Cat C/D visibility ⅛ mile. Baro-VNAV and VDP NA when using Lander altimeter setting. Rwy 10 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 48°C (118°F).

MISSED APPROACH: Climb to 8600 direct DONVY and hold.

ASOS	SALT LAKE CENTER	UNICOM
121.425	133.25 285.6	122.8 (CTAF) L

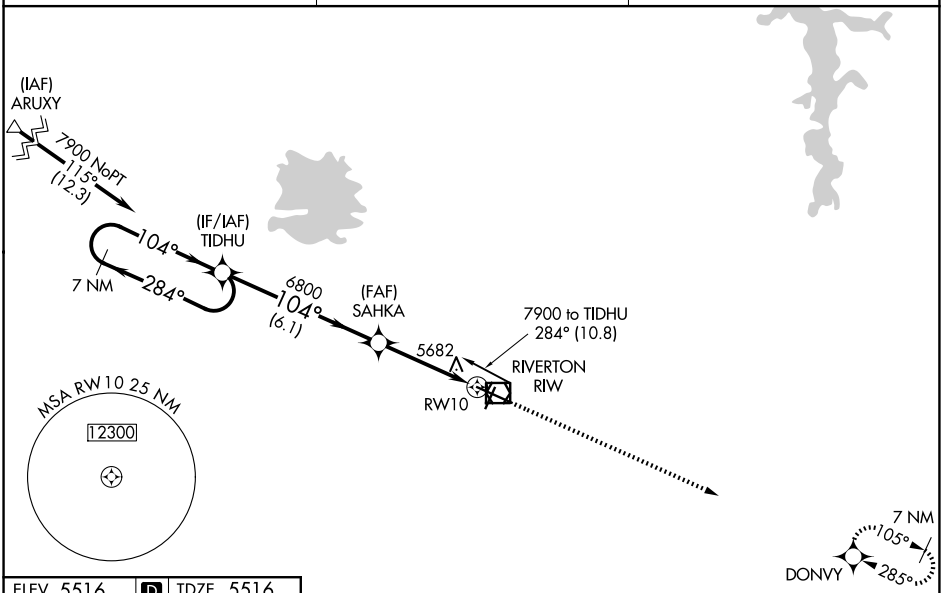



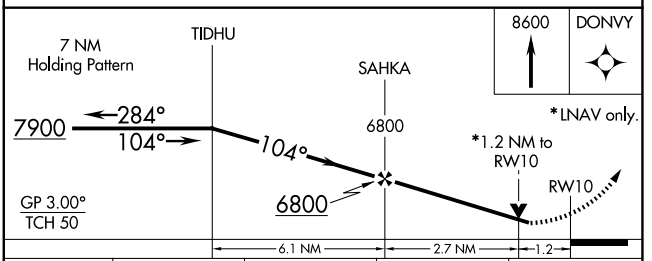

ELEV 5516 D TDZE 5516

CATEGORY	A	B	C	D
LPV DA	5902-1¼ 386 (400-1¼)			
LNAV/VNAV DA	5965-1½ 449 (500-1½)			
LNAV MDA	5940-1 424 (500-1)		5940-1¼ 424 (500-1¼)	
CIRCLING	6000-1 484 (500-1)		6000-1½ 484 (500-1½)	6120-2 604 (700-2)

REIL Rwys 1, 10 and 19 L
MIRL Rwy 1-19 L
HIRL Rwy 10-28 L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026