RNAV (GPS) Y RWY 12R

MINETA SAN JOSE INTL (SJC)


WAAS	APP CRS		12R	12L
CH 90106	126°	Rwy Ldg	8587	8831
W12A		TDZE	46	44
		Apt Elev	62	62

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cats C/D visibility to 1⅜ mile.


MALSR Rwy 12R

MISSED APPROACH: Climb to 4600 direct HIVAK and on track 124° to GILRO and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER★	GND CON	UNICOM
126.95	120.1 290.25	124.0 (CTAF) L 257.6	121.7	122.95

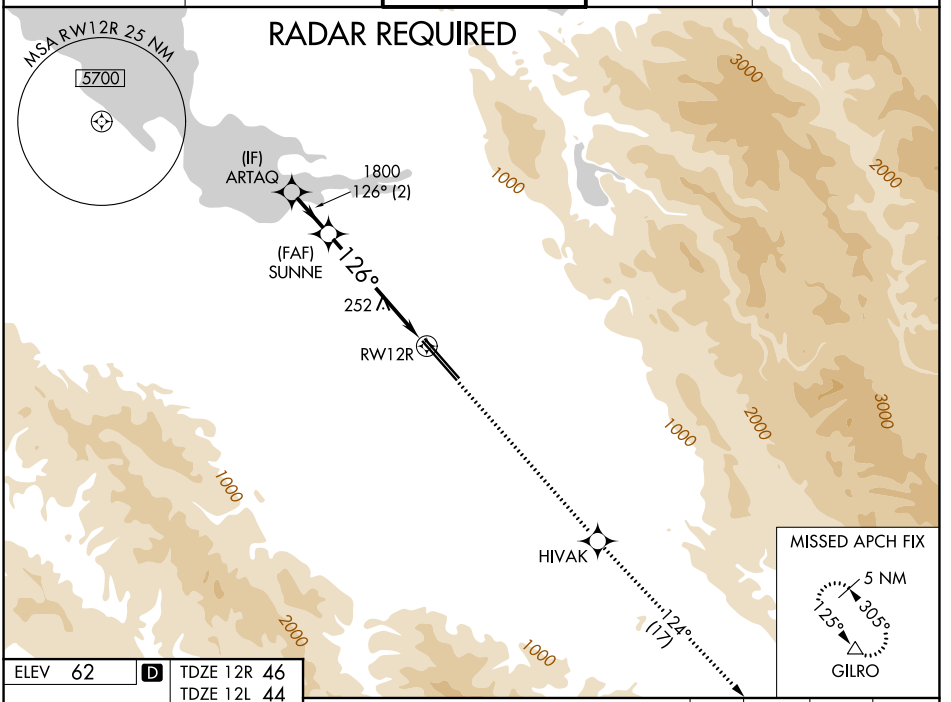

ELEV 62 D TDZE 12R 46 TDZE 12L 44




REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

4600	HIVAK	tr 124°	GILRO

*LNAV only

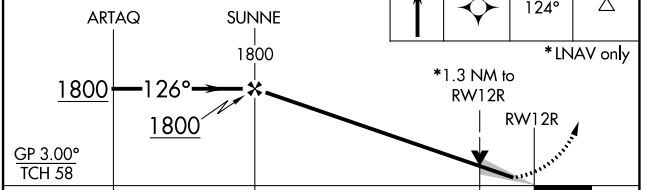

CATEGORY	A	B	C	D
LPV DA	246-½ 200 (200-½)			
LNAV/VNAV DA	371-⅝ 325 (400-⅝)	371-1 325 (400-1)		
LNAV MDA	520-½ 474 (500-½)		520-1 474 (500-1)	
SIDESTEP 12L	520-1 476 (500-1)		520-1½ 476 (500-1½)	520-2 476 (500-2)

SW-2, 29 OCT 2026 to 26 NOV 2026