WAAS	APP CRS		30L	30R
CH **97306**	**306°**	Rwy Ldg	**7614**	**7597**
W30A		TDZE	**57**	**55**
		Apt Elev	**62**	**62**

AL-693 (FAA)

26246

RNAV (GPS) Y RWY 30L

MINETA SAN JOSE INTL (SJC)


RNP APCH-GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.
* RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR Rwy 30L

MISSED APPROACH: Climb to 2300 direct MUSSK and hold.


D-ATIS	NORCAL APP CON	SAN JOSE TOWER*	GND CON	UNICOM
126.95	**120.1 290.25**	**124.0** (CTAF) L **257.6**	**121.7**	**122.95**

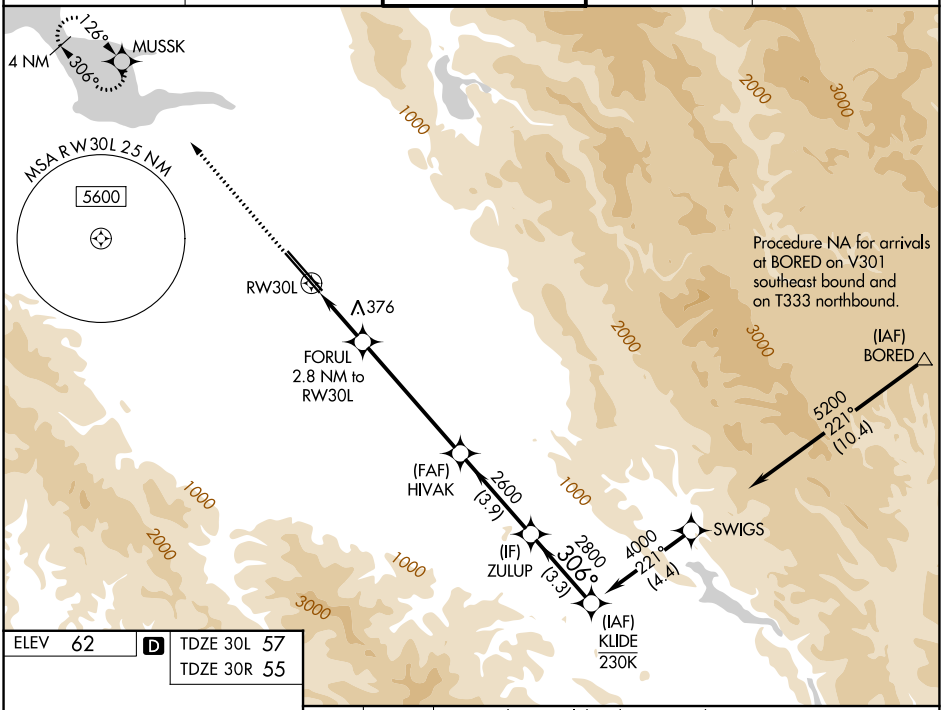

ELEV 62 D TDZE 30L 57 TDZE 30R 55



REIL Rwy 12L
HIRL Rwys 12L-30R and 12R-30L L

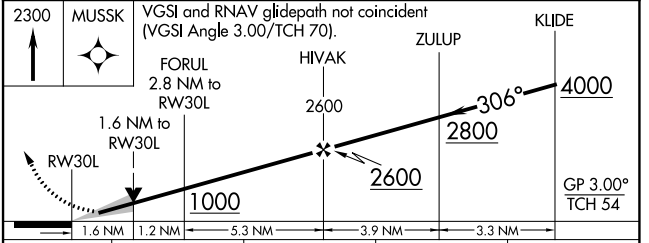

CATEGORY	A	B	C	D
LPV DA*	257/24 200 (200-½)			
LNAV/VNAV DA	540/50 483 (500-1)			
LNAV MDA	640/24 583 (600-½)		640-1¼ 583 (600-1¼)	
SIDESTEP 30R	640-1 585 (600-1)			

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026