RNAV (GPS) RWY 24


OWENSBORO/DAVIESS COUNTY RGNL (OWB)

WAAS	APP CRS	Rwy Ldg	5000
CH 49116	236°	TDZE	403
W24A		Apt Elev	407


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Rwy 24 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Evansville altimeter setting: increase LPV DA to 712 feet and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 902 feet and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cats C/D visibility ¼ mile. Baro-VNAV and VDP NA when using Evansville altimeter setting.

MISSED APPROACH: Climb to 3000 direct FOLAB and hold.


AWOS-3PT	EVANSVILLE APP CON ★	OWENSBORO TOWER ★	GND CON	UNICOM
119.025	124.025 290.9	120.7 (CTAF) L 251.15	121.7	122.95

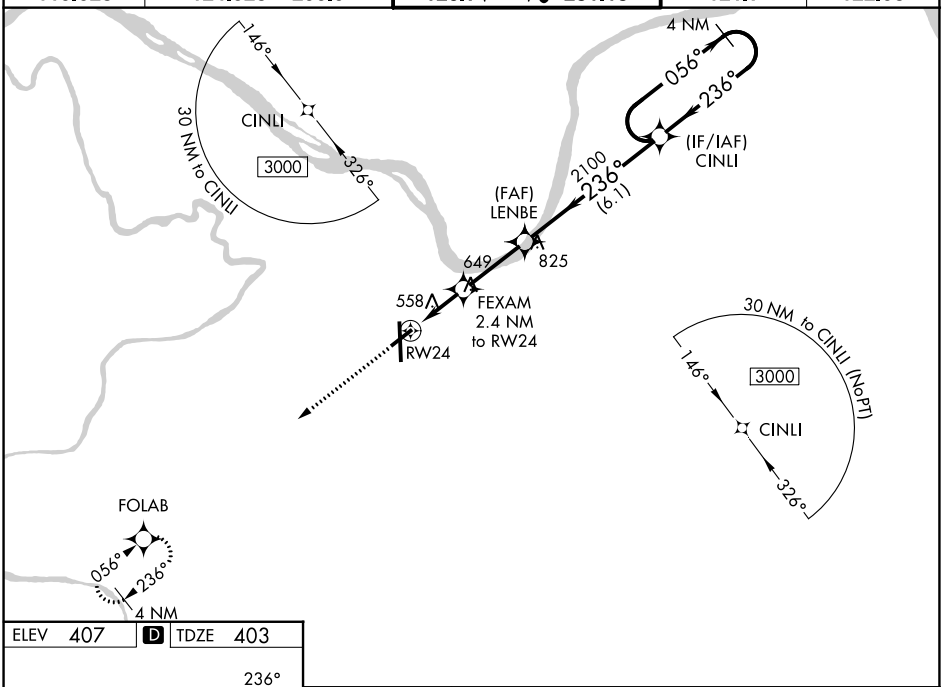

ELEV 407 D TDZE 403

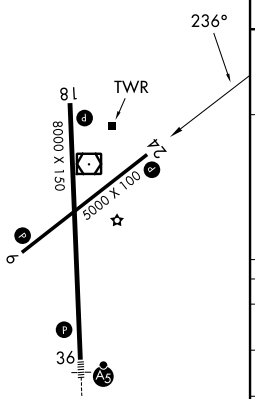

MIRL Rwy 6-24 L
HIRL Rwy 18-36 L
REIL Rwys 6, 18 and 24 L

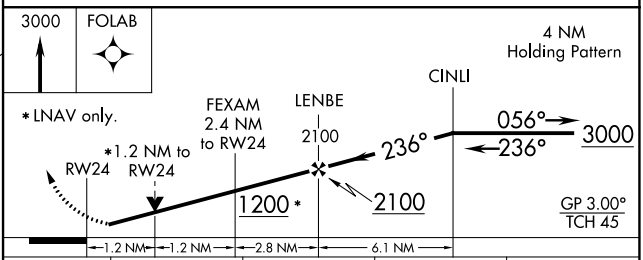

CATEGORY	A	B	C	D
LPV DA	653-¾ 250 (300-¾)			
LNAV/VNAV DA	843-1½ 440 (500-1½)			
LNAV MDA	820-1 417 (500-1)		820-1⅛ 417 (500-1⅛)	
CIRCLING	860-1 453 (500-1)	1120-1 713 (800-1)	1140-2 733 (800-2)	1140-2¼ 733 (800-2¼)

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026