RNAV (GPS) RWY 30

DECATUR (DEC)

WAAS	APP CRS	Rwy Ldg	6799
CH 49127	300°	TDZE	679
W30A		Apt Elev	682


RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.


A When local altimeter setting not received, use Lincoln altimeter setting and increase all DA/MDA 80 feet, increase LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting.


MISSED APPROACH: Climb to 3000 direct YENVU and hold.

ATIS	CHAMPAIGN APP CON★	DECATUR TOWER★	GND CON	UNICOM
126.35	132.85 290.225	118.9 (CTAF) L 291.775	121.75 291.775	122.95

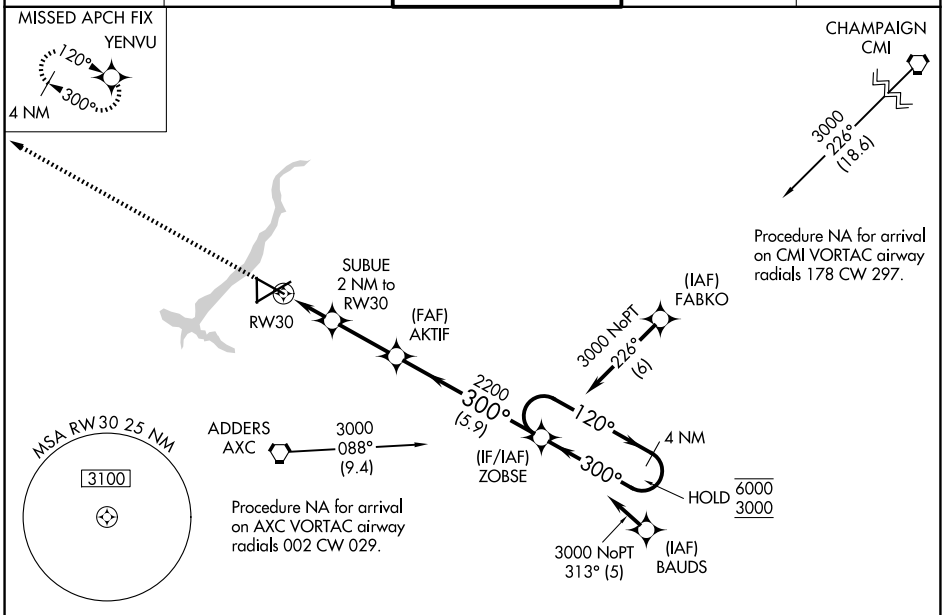

ELEV 682 D TDZE 679



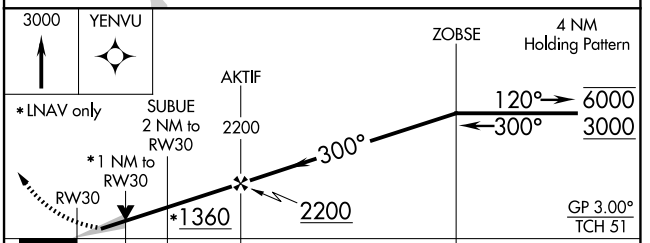

CATEGORY	A	B	C	D
LPV DA	879-1 200 (200-1)			
LNAV/VNAV DA	929-1 250 (300-1)			
LNAV MDA	1060-1 381 (400-1)		1060-1⅛ 381 (400-1⅛)	
CIRCLING	1140-1 458 (500-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2¼ 678 (700-2¼)

HIRL Rwy 6-24 L

MIRL Rwys 12-30 and 18-36 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026