RNAV (GPS) RWY 35

KALAMAZOO/BATTLE CREEK INTL (AZO)

WAAS CH 61102 W35A	APP CRS 354°	Rwy Ldg 6952 TDZE 870 Apt Elev 874


RNP APCH - GPS.

T A Circling Rwy 5, 9, 23, 27 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use BTL altimeter setting and increase LPV DA to 1112 feet; increase LNAV/VNAV DA to 1308 feet and all visibilities to RVR 4000; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5000 and Circling visibility Cat C/D ¼ SM. Baro-VNAV and VDP NA when using BTL altimeter setting. For inop ALS, increase LNAV Cat C/D visibility to RVR 6000. *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using BTL altimeter setting).


MALSR


MISSED APPROACH: Climb to 3000 direct OSEGO and hold.

ATIS	GREAT LAKES APP CON ★	KALAMAZOO TOWER ★	GND CON	UNICOM
127.25	121.2 239.25	118.3 (CTAF) L 257.875	121.9	122.95

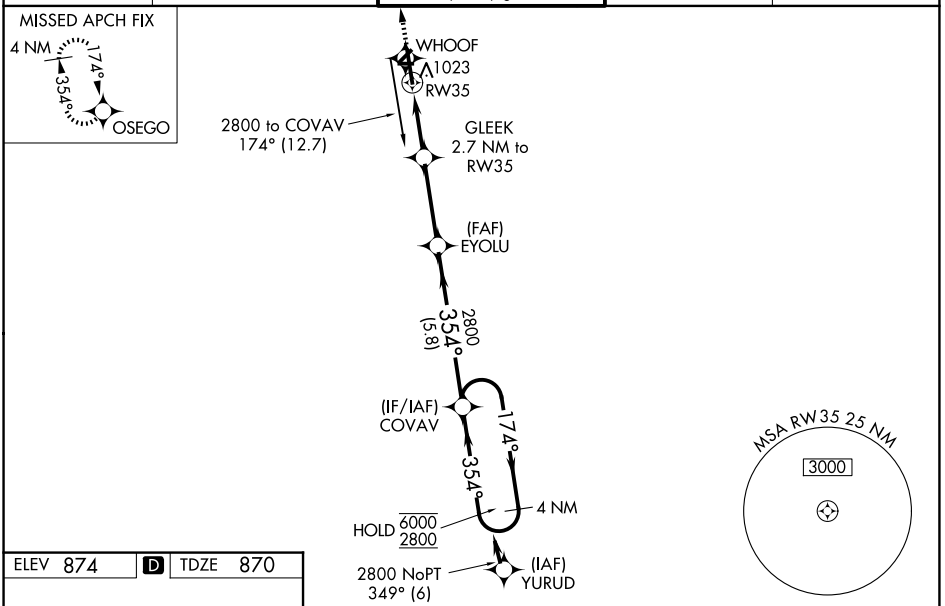

ELEV 874 D TDZE 870

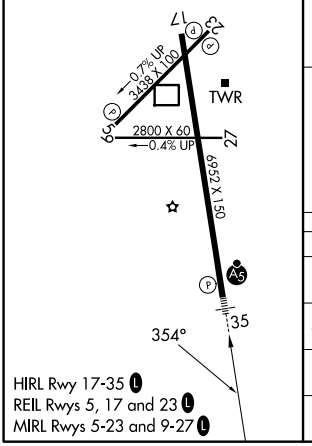

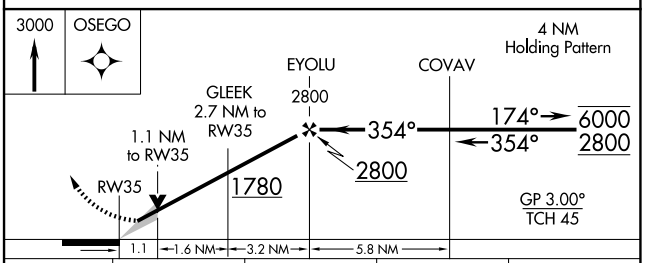

CATEGORY	A	B	C	D
LPV DA *	1070/24 200 (200-½)			
LNAV/VNAV DA	1266/35 396 (400-⅝)			
LNAV MDA	1280/24 410 (500-½)		1280/40 410 (500-¾)	
CIRCLING	1340-1 466 (500-1)		1560-2 686 (700-2)	1560-2¼ 686 (700-2¼)

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026