# RNAV (GPS) RWY 1

## ALPENA COUNTY RGNL (APN)

| WAAS CH 50310 W01A | APP CRS 007° | Rwy Ldg 9001 / TDZE 685 / Apt Elev 690 |
|---|---|---|


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using PZQ altimeter setting. For inop ALS, increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats visibility to 1 SM and LNAV Cats C/D visibility to 1 ⅜ SM. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1029 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1084 feet; increase all MDAs 60 feet. For inop ALS when using PZQ altimeter setting, increase LPV all Cats visibility to 1 SM.

MALSR


MISSED APPROACH: Climb to 3500 direct HIMVO and on track 307° to RABBO and hold.


| ATIS | ALPENA APP CON ★ | ALPENA TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 120.675 327.05 | 128.425 379.3 | 121.35 (CTAF) L 318.1 | 121.9 275.8 | 122.95 |

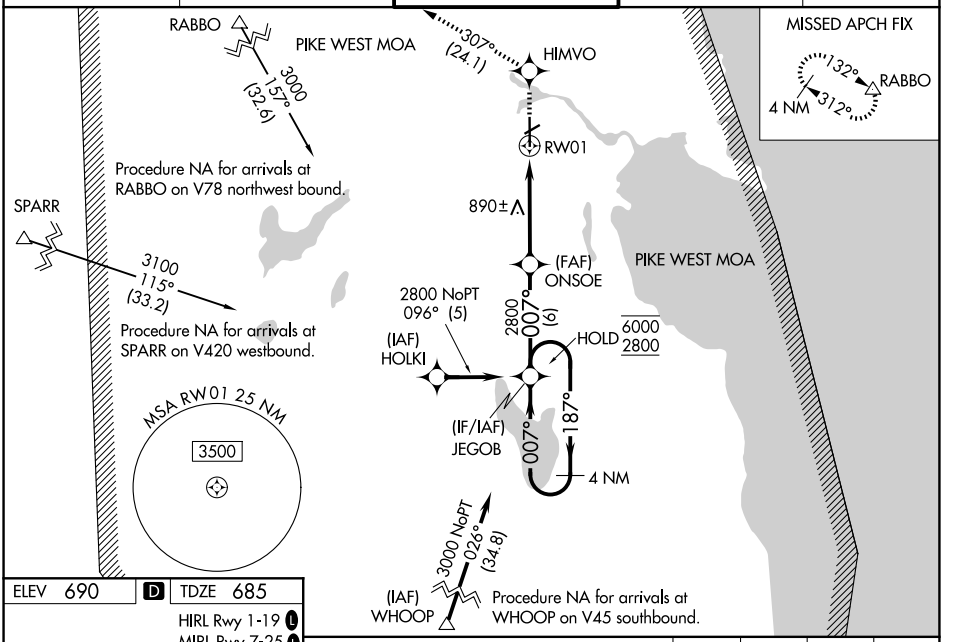


ELEV 690 D TDZE 685

HIRL Rwy 1-19 L
MIRL Rwy 7-25 L
REIL Rwys 7, 19 and 25 L

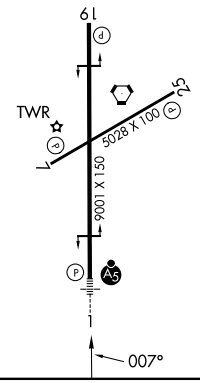

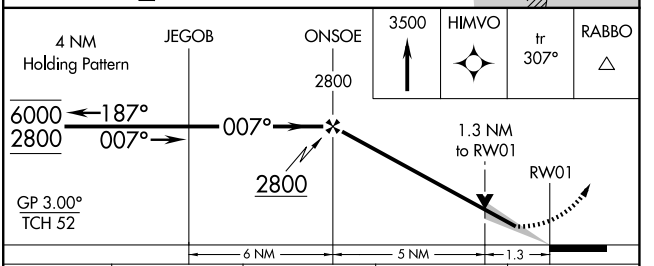
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 974-½ 289 (300-½) | | | |
| LNAV/VNAV DA | 1029-⅝ 344 (400-⅝) | | | |
| LNAV MDA | 1160-½ 475 (500-½) | | 1160-1 475 (500-1) | |
| CIRCLING | 1160-1 470 (500-1) | | 1220-1½ 530 (600-1½) | 1300-2 610 (700-2) |



EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026