WAAS	APP CRS	Rwy Ldg	4007
CH 86400	350°	TDZE	49
W35A		Apt Elev	49

RNAV (GPS) RWY 35

NORWOOD MEML (OWD)


RNP APCH.

T A Rwy 35 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase LPV all Cats visibility to ⅞ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Circling NA at night.

MALSF

MISSED APPROACH: Climb to 3000 direct DEGEY and on track 293° to WHYBE and hold, continue climb-in-hold to 3000.


ATIS	BOSTON APP CON	NORWOOD TOWER ★	GND CON
119.95	124.1 263.1	126.0 (CTAF) L	121.8

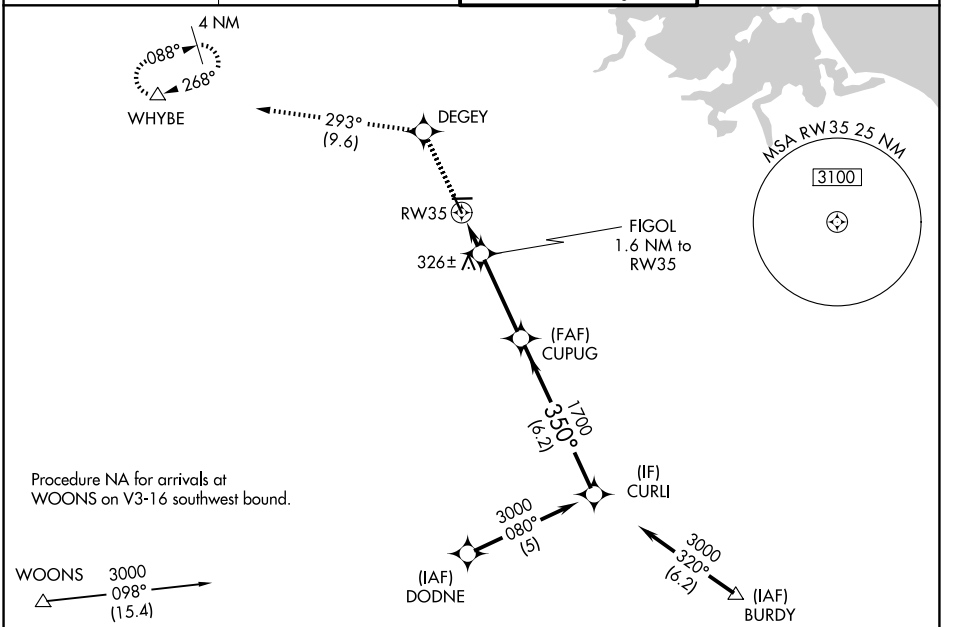


NE-1, 29 OCT 2026 to 26 NOV 2026

NE-1, 29 OCT 2026 to 26 NOV 2026

ELEV 49 D TDZE 49

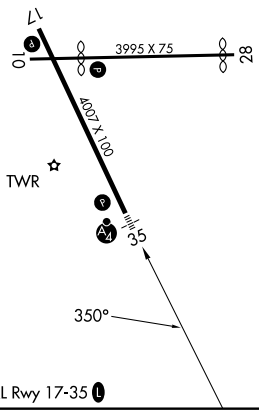

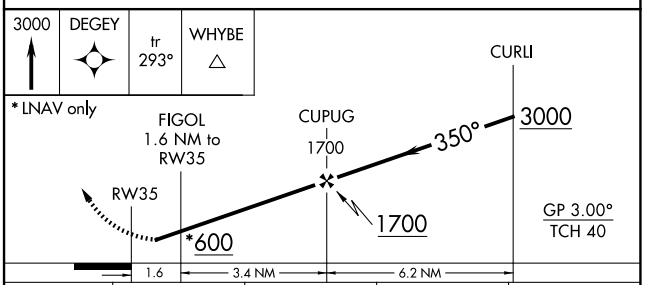

CATEGORY	A	B	C	D
LPV DA	344-¾ 295 (300-¾)			
LNAV/VNAV DA	594-1⅜ 545 (600-1⅜)			
LNAV MDA	580-¾ 531 (600-¾)		580-1¼ 531 (600-1¼)	
CIRCLING	600-1 551 (600-1)	700-1 651 (700-1)	1220-3 1171 (1200-3)	