RNAV (GPS) RWY 17L

WILEY POST (PWA)

WAAS	APP CRS	Rwy Ldg	6844
CH 72737	175°	TDZE	1291
W17A		Apt Elev	1300


RNP APCH-GPS.


T A ASR — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM and LNAV Cat C/D visibility to 1 SM.

MALSR


MISSED APPROACH: Climb to 1700 then climbing right turn to 3400 direct BISKT and hold.

ATIS	OKE CITY APP CON	WILEY POST TOWER ★	GND CON
128.725	124.6 266.8	126.9 (CTAF) L 306.9	121.7

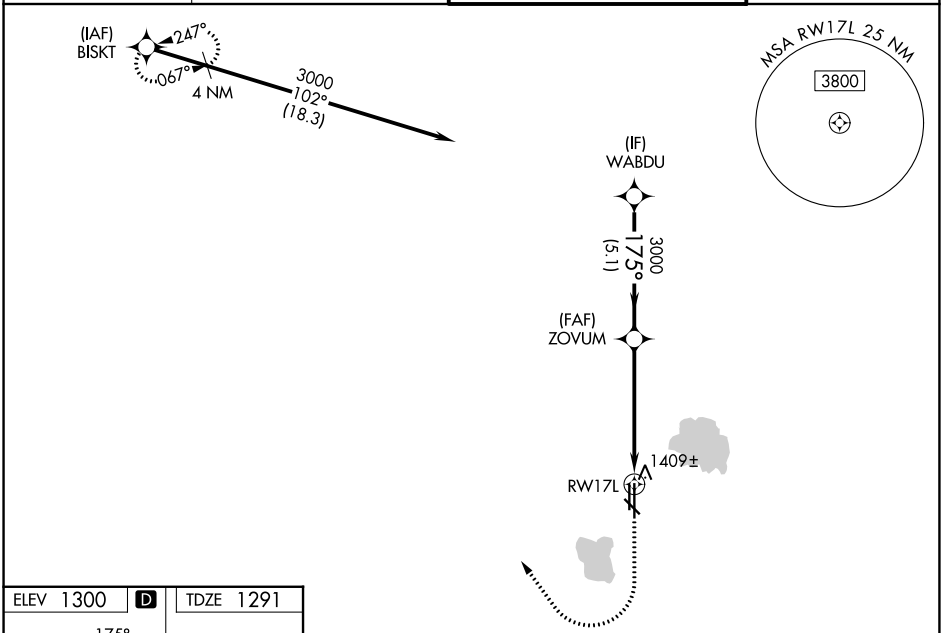

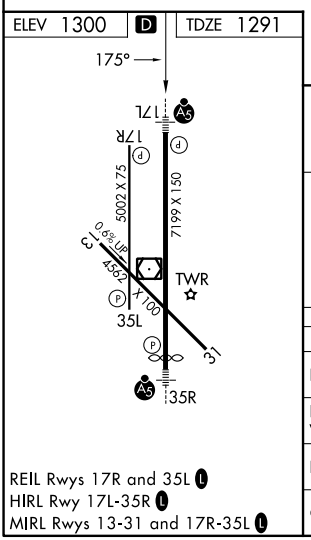

REIL Rwys 17R and 35L L
HIRL Rwy 17L-35R L
MIRL Rwys 13-31 and 17R-35L L

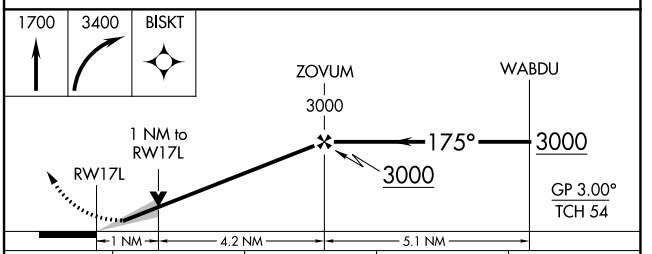

CATEGORY	A	B	C	D
LPV DA	1491-½ 200 (200-½)			
LNAV/VNAV DA	1590-½ 299 (300-½)			
LNAV MDA	1660-½ 369 (400-½)		1660-⅝ 369 (400-⅝)	
CIRCLING	1780-1 480 (500-1)		1880-1½ 580 (600-1½)	1880-2 580 (600-2)

SC-1, 29 OCT 2026 to 26 NOV 2026
SC-1, 29 OCT 2026 to 26 NOV 2026