ILS or LOC RWY 31


DALLAS EXEC (RBD)


LOC/DME I-RBD	APP CRS	Rwy Ldg	6601
110.75	309°	TDZE	660
Chan 44 (Y)		Apt Elev	661


RADAR required for procedure entry.
DME or RADAR required for LOC only.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2500 on heading 090° and CVE VOR/DME R-125 to FLIPP/CVE 38.5 DME and hold.

ATIS	LONE STAR APP CON	EXECUTIVE TOWER ★	GND CON	UNICOM
126.35	125.2 343.65	127.25 (CTAF) L	119.475	122.95

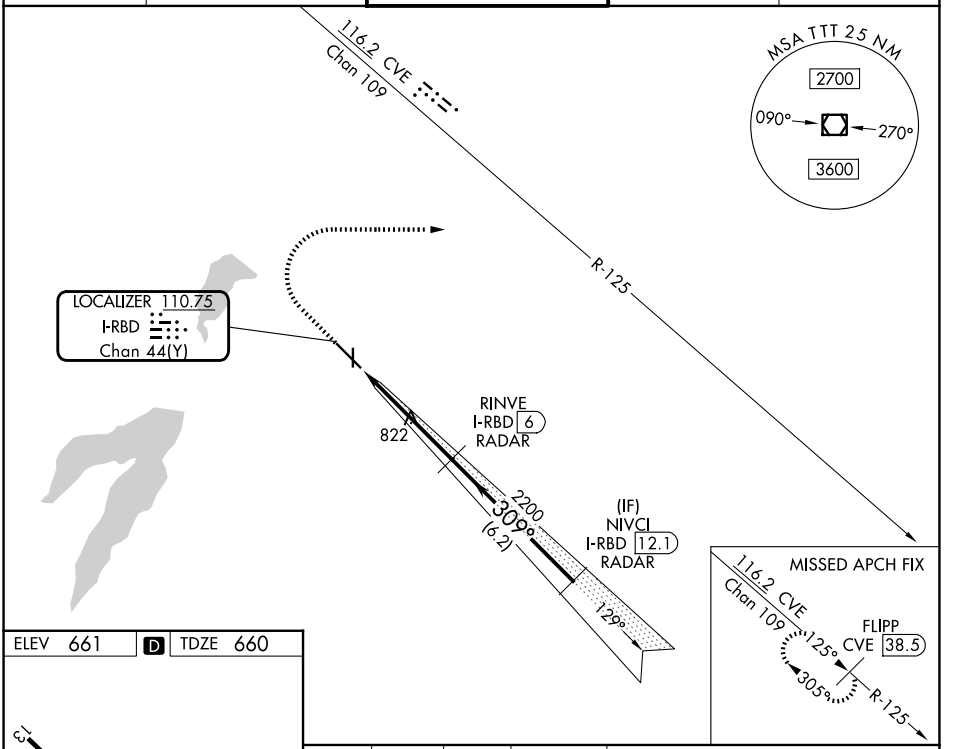

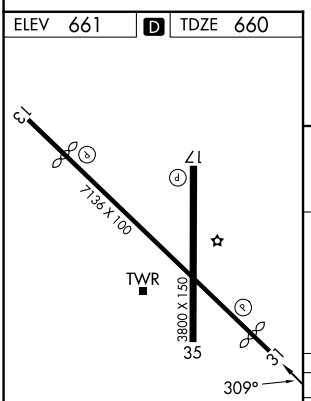

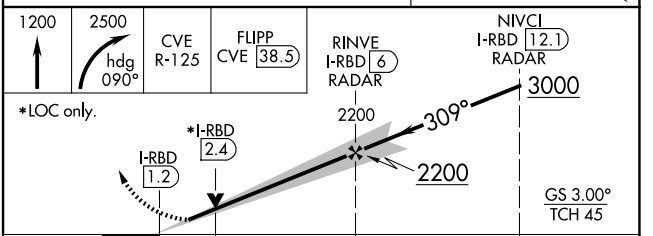

REIL Rwys 13, 17, 31 and 35
MIRL Rwys 13-31 and 17-35 L

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

CATEGORY	A	B	C	D
S-ILS 31	860-¾ 200 (200-¾)			
S-LOC 31	1080-1 420 (500-1)		1080-1⅛ 420 (500-1⅛)	
CIRCLING	1160-1 499 (500-1)	1220-1 559 (600-1)	1340-2 679 (700-2)	1400-2¼ 739 (800-2¼)

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026