RNAV (GPS) RWY 28L

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

WAAS	APP CRS	Rwy Ldg	8000
CH 58336	276°	TDZE	65
W28B		Apt Elev	65


RNP APCH-GPS.

Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.


MALSF

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct GEGEY and hold.


D-ATIS	MIAMI APP CON	FORT LAUDERDALE TOWER	GND CON
135.0	133.775 285.6	119.3 257.8	121.4

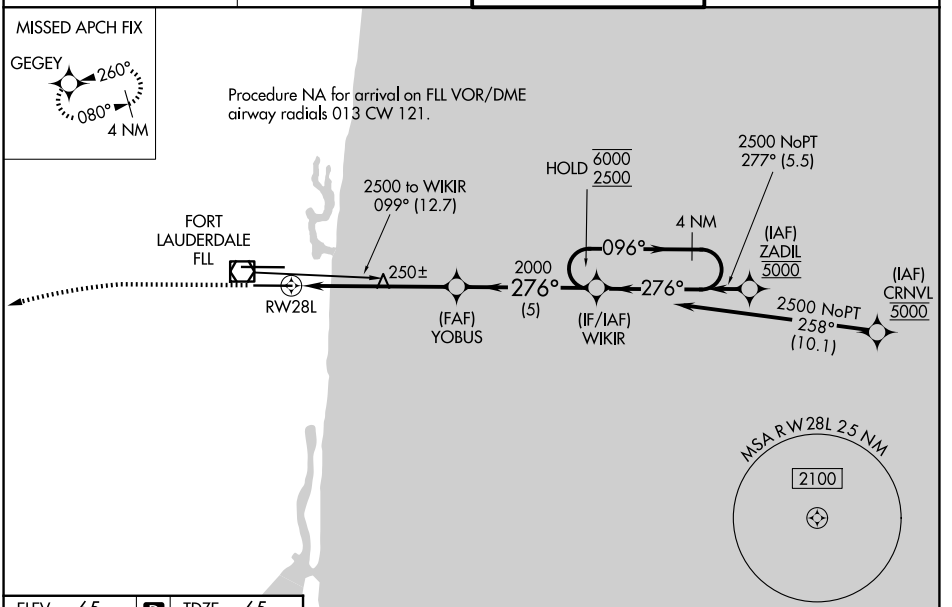

ELEV 65 D TDZE 65



HIRL Rwy 10L-28R and 10R-28L

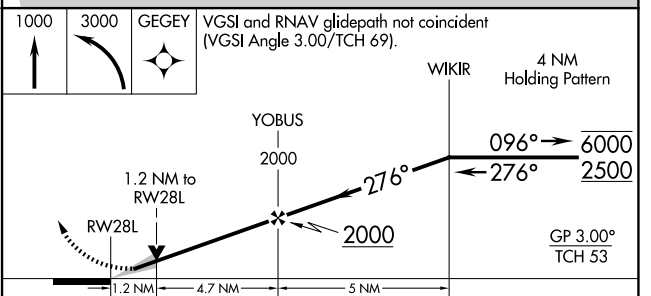

CATEGORY		A	B	C	D
LPV	DA	265/40	200 (200-¾)		
LNAV/VNAV	DA	459/45	394 (400-⅞)		
LNAV	MDA	500/40	435 (500-¾)	500/50	435 (500-1)
CIRCLING		680-1	615 (700-1)	800-2 735 (800-2)	800-2¼ 735 (800-2¼)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026