RNAV (GPS) Y RWY 30

GARY/CHICAGO INTL (GYY)

WAAS	APP CRS	Rwy Ldg	7959
CH 78323	306°	TDZE	591
W30A		Apt Elev	597

RNP APCH - GPS.


T A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV Cat C and D visibility to RVR 6000.
** RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Chicago Midway Intl altimeter setting).


MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2400 direct KIKVE and hold.


D-ATIS	CHICAGO APP CON	GARY TOWER ★	GND CON
134.575	133.1 285.6	125.6 (CTAF) L	121.9

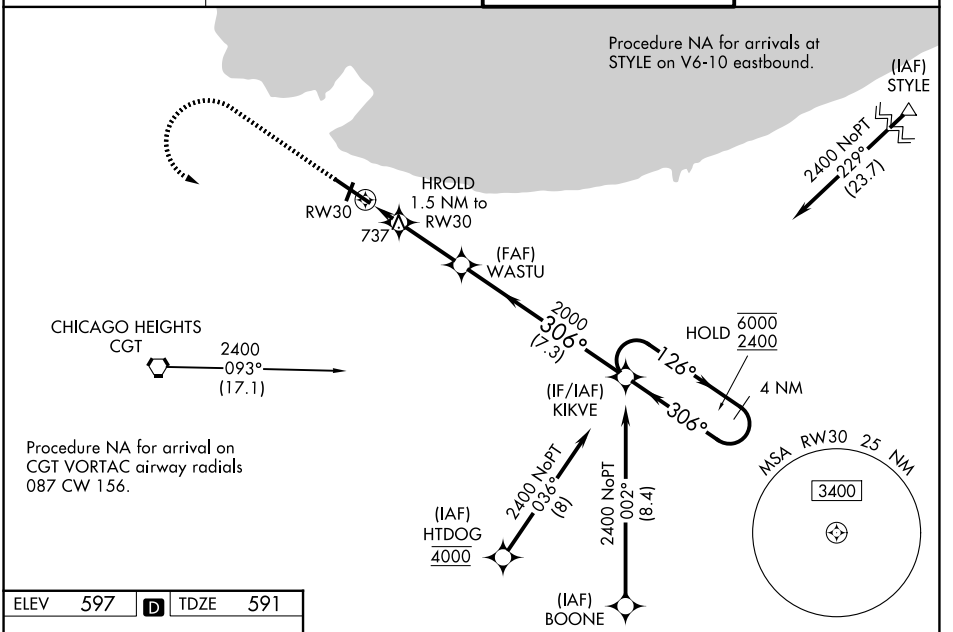

ELEV 597	D	TDZE 591



REIL Rwys 2, 12 and 20 L
HIRL Rwy 12-30 L
MIRL Rwy 2-20 L

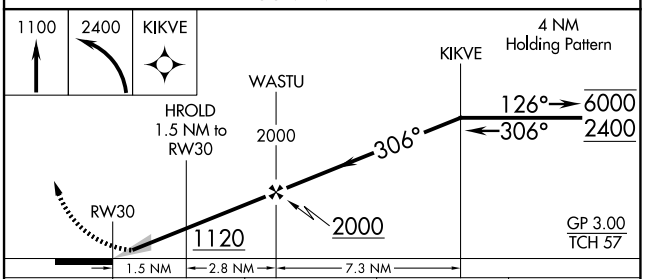

CATEGORY	A	B	C	D
LPV DA**	791/24	200 (200-½)		
LNAV/VNAV DA	991/35	400 (400-⅝)		
LNAV MDA	1000/24	409 (500-½)	1000/40	409 (500-¾)
CIRCLING	1160-1	563 (600-1)	1180-1	583 (600-1)	1400-2¼	803 (900-2¼)	1420-2¾	823 (900-2¾)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026