
ZAAPA SEVEN DEPARTURE (RNAV)

(ZAAPA7.ZAAPA) 29OCT26

CLEVELAND DEP CON
125.35 346.325
AWOS-3PT
119.225
CTAF
122.725


RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE: ASSIGNED BY ATC

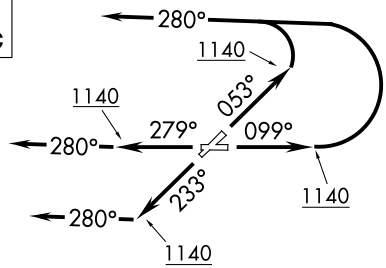

TAKEOFF MINIMUMS:
Rwys 5, 10, 23, 28: Standard with minimum climb of 500'/NM to 1140.

NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

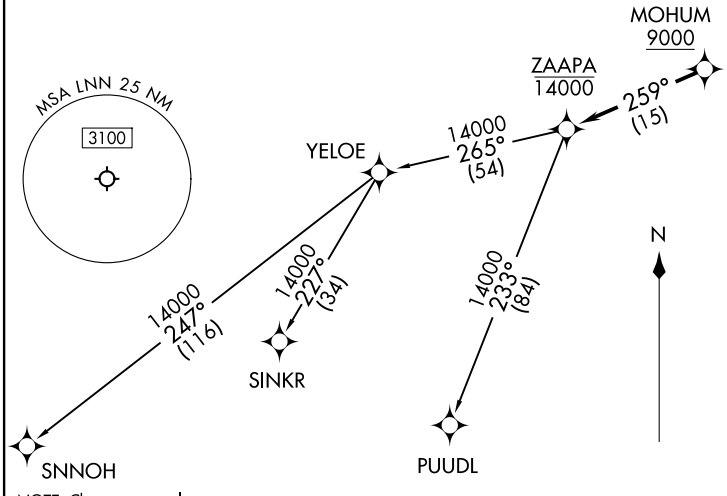

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 5: Climb on heading 053° to 1140, then left turn heading 280° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 10: Climb on heading 099° to 1140, then left turn heading 280° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 23: Climb on heading 233° to 1140, then on heading 280° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 28: Climb on heading 279° to 1140, then on heading 280° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUUDL TRANSITION (ZAAPA7.PUUDL)
SINKR TRANSITION (ZAAPA7.SINKR)
SNNOH TRANSITION (ZAAPA7.SNNOH)

ZAAPA SEVEN DEPARTURE (RNAV)
(ZAAPA7.ZAAPA) 26302
AL-753 (FAA)
LAKE COUNTY EXEC (LNN)
WILLOUGHBY, OHIO