RNAV (GPS) Z RWY 21

CHARLOTTESVILLE-ALBEMARLE (CHO)


WAAS CH 45602 W21B	APP CRS 210°	Rwy Ldg 6801 TDZE 626 Apt Elev 640


RNP APCH.

Baro-VNAV NA when using Staunton/Waynesboro/Harrisonburg altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. When local altimeter setting not received, use Staunton/Waynesboro/Harrisonburg altimeter setting and increase all DA 130 feet and LPV visibility ⅛ mile.


MISSED APPROACH: Climb to 1100, then climbing left turn to 4000 direct GVE VORTAC and hold.

ATIS	POTOMAC APP CON	CHARLOTTESVILLE TOWER ★	GND CON	UNICOM
118.425	132.85 323.125	124.5 (CTAF) L 338.275	121.9 338.275	122.95

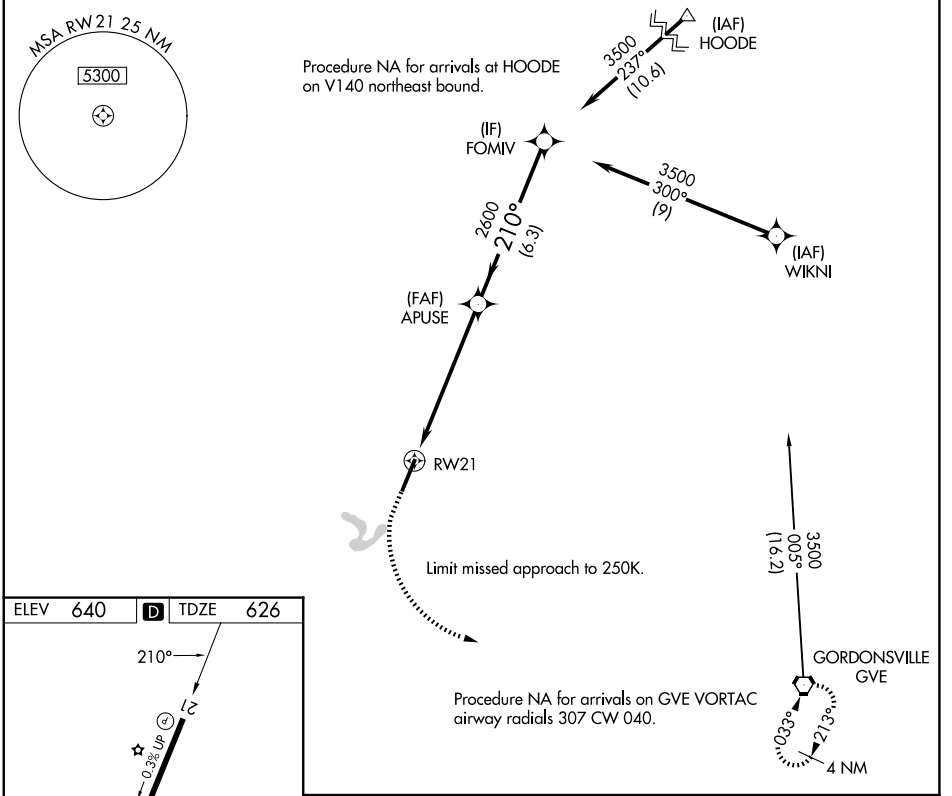

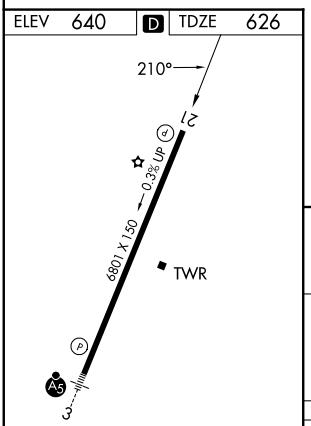

HIRL Rwy 3-21 L
REIL Rwy 21 L

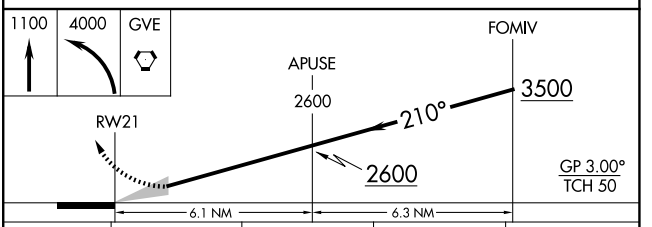

CATEGORY	A	B	C	D
LPV DA	826-1 200 (200-1)			
LNAV/VNAV DA	1588-4 962 (1000-4)			

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026