WAAS	APP CRS	Rwy Ldg	9072
CH 97431	013°	TDZE	1180
W01A		Apt Elev	1205

RNAV (GPS) RWY 1

MARQUETTE SAWYER RGNL (SAW)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1⅛ SM.

MALSR


MISSED APPROACH: Climb to 3500 direct ZUCTI and hold.

AWOS-3PT	MINNEAPOLIS CENTER	SAWYER TOWER ★	GND CON	UNICOM
118.375	119.1 290.2	119.975 (CTAF) L	121.65	122.7

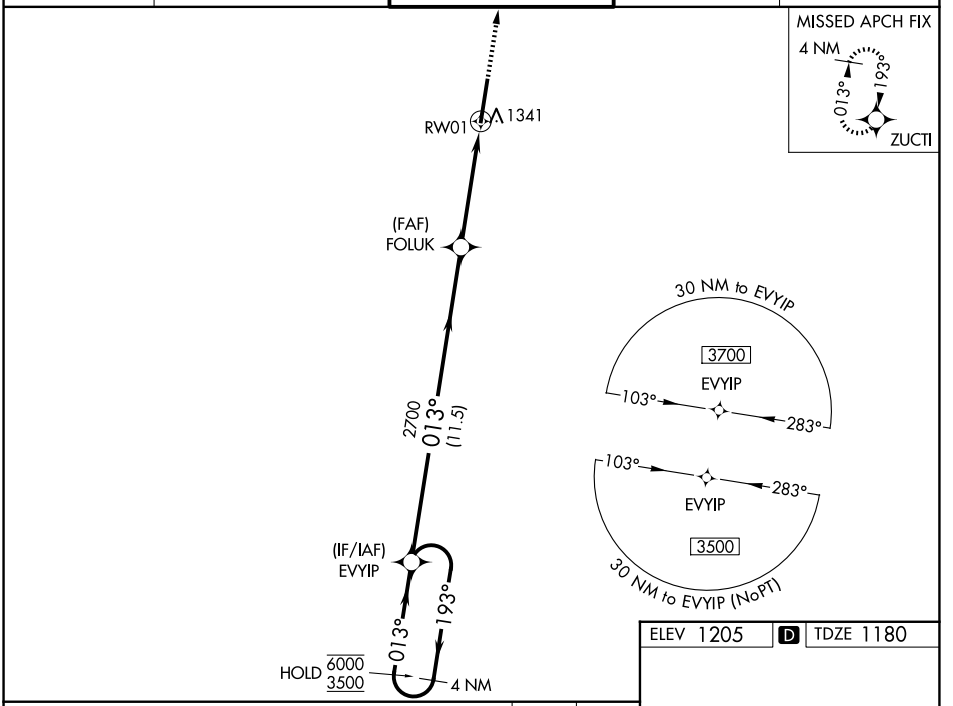

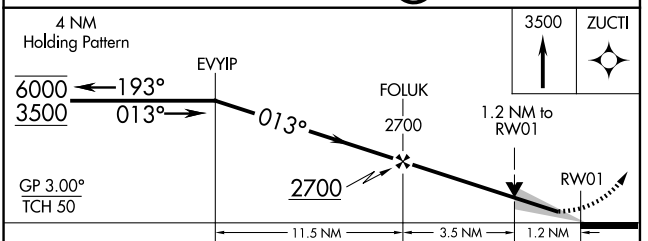

CATEGORY	A	B	C	D
LPV DA	1380-½ 200 (200-½)			
LNAV/VNAV DA	1503-½ 323 (300-½)			
LNAV MDA	1600-½ 420 (400-½)		1600-¾ 420 (400-¾)	
CIRCLING	1680-1 475 (500-1)		1820-1¾ 615 (700-1¾)	1820-2 615 (700-2)

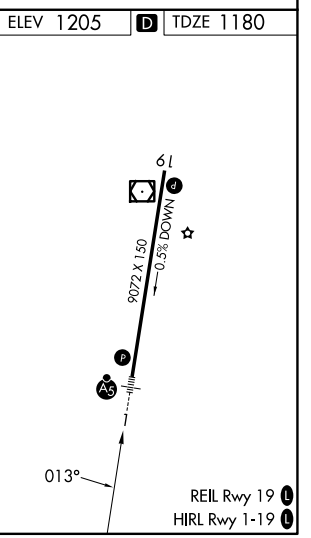

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026