RNAV (GPS) RWY 19

MARQUETTE SAWYER RGNL (SAW)


WAAS	APP CRS	Rwy Ldg	9072
CH 86616 W19A	193°	TDZE	1205
		Apt Elev	1205


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.

MISSED APPROACH: Climb to 3500 direct EVYIP and hold.

AWOS-3PT	MINNEAPOLIS CENTER	SAWYER TOWER ★	GND CON	UNICOM
118.375	119.1 290.2	119.975 (CTAF) L	121.65	122.7

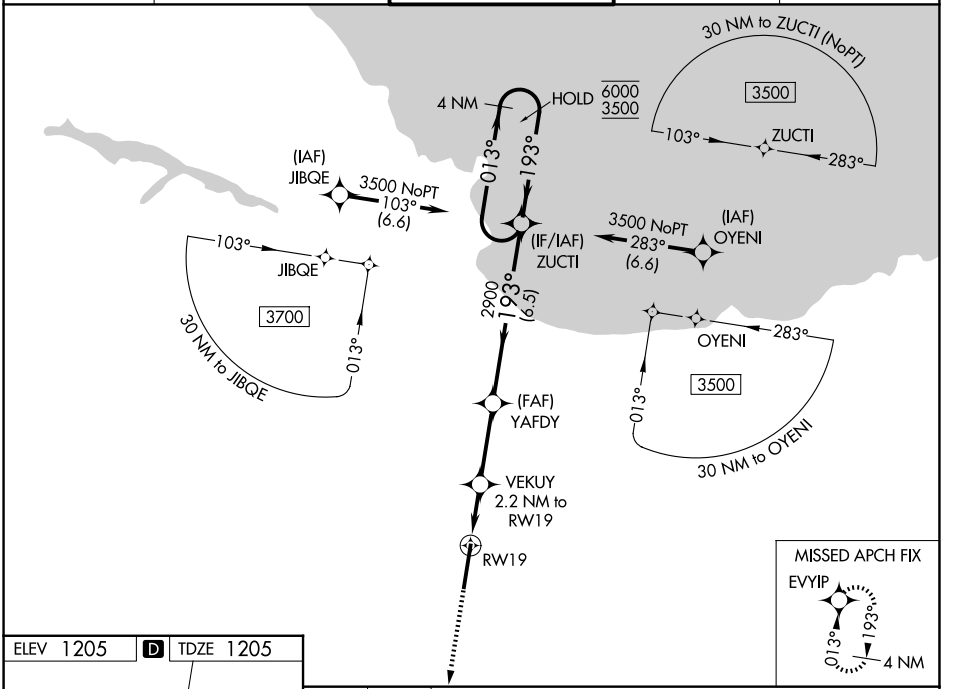

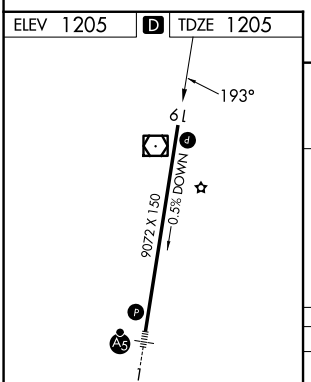

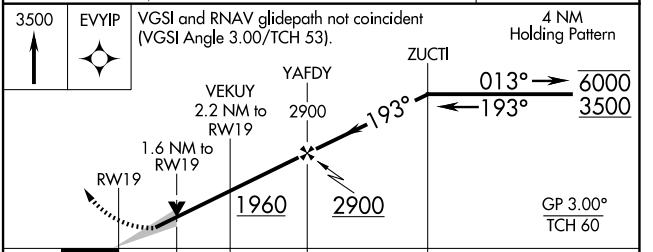

CATEGORY	A	B	C	D
LPV DA	1405-¾ 200 (200-¾)			
LNAV/VNAV DA	1522-⅞ 317 (400-⅞)			
LNAV MDA	1620-1 415 (500-1)		1620-1⅛ 415 (500-1⅛)	
CIRCLING	1680-1 475 (500-1)		1820-1¾ 615 (700-1¾)	1820-2 615 (700-2)

HIRL Rwy 1-19 L
REIL Rwy 19 L

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026