WAAS CH 40228 W16A	APP CRS 162°	Rwy Ldg 7000 TDZE 4202 Apt Elev 4252


RNAV (GPS) RWY 16

WORLAND MUNI (WRL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -32°C (-25°F) or above 17°C (62°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with Greybull altimeter setting. When local altimeter setting not received, use Greybull altimeter setting: increase LPV DA to 4574 feet, LNAV/VNAV DA to 4616 feet, and all MDA's 140 feet; increase LPV, LNAV/VNAV and LNAV all Cats, and Circling Cat C/D visibilities ½ SM. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 9600 direct WAPSU and on track 207° to ZURNA and hold, continue climb-in-hold to 9600.


ASOS	SALT LAKE CENTER	UNICOM
135.475	133.25 285.6	123.05 (CTAF) L

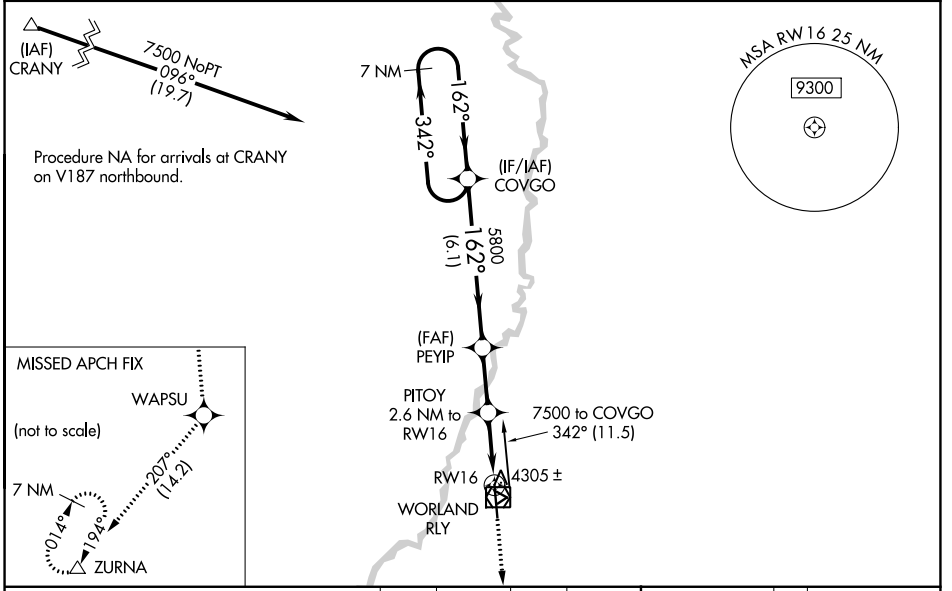

9600	WAPSU	tr 207°	ZURNA


*LNAV only

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).

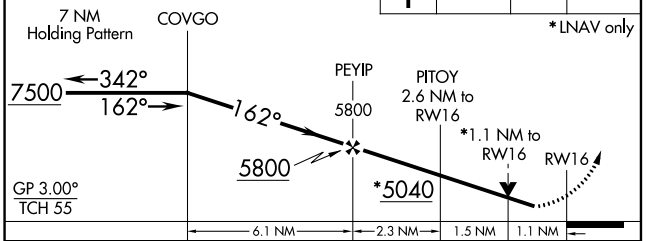

CATEGORY	A	B	C	D
LPV DA	4452-¾ 250 (200-¾)			
LNAV/VNAV DA	4494-⅞ 292 (300-⅞)			
LNAV MDA	4560-1 358 (400-1)		4560-1⅛ 358 (400-1⅛)	
CIRCLING	4920-1 668 (700-1)		4920-1¾ 668 (700-1¾)	5020-2½ 768 (800-2½)

ELEV 4252 D TDZE 4202

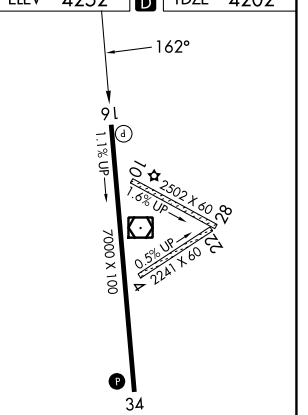

REIL Rwys 16 and 34 L
MIRL Rwy 16-34 L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026